



OPTISWITCH 4000/5000

Technical Datasheet

Vibration level switches for liquids

- Operates up to 250°C / 480°F and 64 bar / 925 psi
- Pump dry-run detection
- High reliability due to permanent fault monitoring function



KROHNE

Universal liquid level switches

OPTISWITCH 4000/5000 series is a level sensor that uses a vibrating fork for detecting level. It is designed for use in all liquids. It is not affected by foam and external vibration. It is also unaffected by variations of product properties such as ϵ_r , viscosity etc.



① OPTISWITCH 4000
② OPTISWITCH 5100
③ OPTISWITCH 5200

Highlights

- Output options: relay, transistor, NAMUR, contactless electronic switch and 2-wire
- 5000 series: Plastic, aluminium or stainless steel housings
- LED signal lamp for indicating the switching condition (with plastic housing only)
- 5000 series: Large choice of materials for wetted parts. This includes 316L, Hastelloy C4, enamel, ECTFE and PFA.
- 5000 series. Probe length: 53...6000 mm / 2...236"
- Repeatability: +/-2 mm
- Thread connections G/NPT 3/4; flange sizes from DN25 PN40; Triclamp 1" or 2" and other hygienic fittings

Industries

- Chemicals
- Food & Beverage
- Water & Wastewater
- Oil & Gas

Applications

- Reactors
- Hygienic and sanitary applications
- Process and storage tanks for liquids
- Dry-run and overflow protection

Features and Options



OPTISWITCH 4000 - The economical version

- Simple and robust measuring system, virtually unaffected by the chemical and physical properties of liquids
- Easily mountable in pipelines from DN 25, vessels and tanks
- Outputs: contactless electronic switch or transistor



OPTISWITCH 5100, 5150 - The compact version

- Standard or HT version, large array of process fittings, housings and electronics
- Outputs: relay, transistor, 2wire, NAMUR or contactless electronic switch
- Process connection option for high temperature up to 250°C / 482°F
- With all relevant approvals (ATEX etc.)
- Version OPTISWITCH 5150 with polished tuning fork e.g. for food processing



OPTISWITCH 5200, 5250 - The special version with probe extension

- Standard or HT version, large array of process fittings, housings and electronics
- Probe length up to 6000 mm / 236"
- Outputs: relay, transistor, 2wire, NAMUR or contactless electronic switch
- Process connection option for high temperature up to 250°C / 482°F
- With all relevant approvals (ATEX etc.)
- Version OPTISWITCH 5150 with polished tuning fork e.g. for food processing

Technical data

OPTISWITCH 4000 C

Function

| | |
|-----------------------|----------------------------|
| Measurement parameter | Level detection of liquids |
|-----------------------|----------------------------|

Measurement accuracy

| | |
|------------------|---|
| Hysteresis | Approx. 2 mm / 0.08" with vertical installation |
| Integration time | Approx. 500 ms |
| Frequency | Approx. 1200 Hz |

Operating conditions

| | |
|-------------------------------------|---|
| Temperature | |
| Ambient temperature on housing | -40...+70°C / -40...+158°F |
| Storage and transport temperature | -40...+80°C / -40...+176°F |
| Process temperature | |
| Standard | -40...+100°C / -40...+212°F |
| High temperature version (optional) | -40...+150°C / -40...+302°F |
| Temperature shock | No limitation |
| Process pressure | -1...64 bar / -14.5...928 psi |
| Viscosity (dynamic) | 0.1...10.000 mPa s (requirement: with SG=1) |
| Density | >0.7 g/cm ² / >0.025 lbs/in ² |

Materials

| | |
|--------------------------|--|
| Wetted parts | |
| Process fitting – thread | 316L |
| Gaskets | Klingersil C-4400 |
| Vibrating element | 316L |
| Non-wetted parts | |
| Housing | 316L and plastic PEI |
| Surface quality | |
| Standard | Ra = approx. 3.2 μm / 1.26 ⁻⁴ " |
| Hygienic version | Ra < 0.8 μm / 3.15 ⁻⁵ " |

Process connection

| | |
|-------------------|--|
| Thread | G¾ A; ¾ NPT; G1 A; 1 NPT |
| Hygienic fittings | Bolting DN 25 PN 40; bolting DN 40 PN 40; Tri-Clamp 1"; Tri-Clamp 1½"; SMS |

Power Supply

| | |
|--------------------------------------|---|
| Transistor output | |
| Supply voltage | 10...55 VDC |
| Power consumption | Max. 0.5 W |
| Contactless electronic switch | |
| Supply voltage | 20...253 VAC, 50/60 Hz, 20...253 VDC |
| Power consumption | Approx. 3 mA (via load circuit) |
| Operating elements | |
| Control lamp | Illuminated lens for indication of the switching condition. |
| Mode adjustment | Min./max. adjustment through electrical connection |
| Electromechanical data | |
| Plug connection | 1x plug M12x1 or 1x plug DIN 43650 |
| Screwed terminals | For wire cross-section up to 1.5 mm ² |

Output

| | |
|--------------------------------------|---|
| Transistor output | Floating transistor output, overload and permanently shortcircuit-proof |
| Load current | Max. 250 mA |
| Voltage loss | Max. 1 V |
| Turn-on voltage | Max. 55 VDC |
| Blocking current | <10 µA |
| Modes (adjustable) | Min. / max. |
| Delay time | When immersed: approx. 0.5 s; when uncovered: approx. 1 s |
| Contactless electronic switch | Contactless electronic switch |
| Modes (adjustable) | Min. / max. |
| Delay time | When immersed: approx. 0.5 s; when uncovered: approx. 1 s |

Approvals

| | |
|---|---|
| Protection category | |
| Valve plug | IP 65 |
| Valve plug with IDC method of termination | IP 67 |
| M12x1 plug connection (only with transistor output) | IP 66/IP 67 |
| Overvoltage category | III |
| Protection class | |
| Transistor output | II |
| Contactless electronic switch | I |
| CE conformity | |
| EMC (89/336/EEC) | Emission EN 61326: 1997 (class B), immunity EN 61326: 1997/A1: 1998 |
| LVD (73/23/EEC) | EN 61010-1: 2001 |
| SIL conformity | OPTISWITCH fulfills the requirements of functional safety according to IEC 61508. |

OPTISWITCH 5000 C series

Function

| | |
|-----------------------|----------------------------|
| Measurement parameter | Level detection of liquids |
|-----------------------|----------------------------|

Design

| Sensor length | |
|---------------------------------|---------------------------|
| OPTISWITCH 5100 C, 5150 C | See chapter "Dimensions". |
| OPTISWITCH 5200 C, 5250 C | |
| 316L, 2.4610 (Hastelloy C4) | 80...6000 mm / 3...236" |
| 2.4610 (Hastelloy C4) enamelled | 80...1500 mm / 3...59" |
| 1.4435 (316L) ECTFE coated | 80...3000 mm / 3...118" |
| 1.4435 (316L) PFA coated | 80...3000 mm / 3...118" |

Measurement accuracy

| | |
|------------------|---|
| Hysteresis | Approx. 2 mm / 0.08" with vertical installation |
| Integration time | Approx. 500 ms |
| Frequency | Approx. 1200 Hz |

Operating conditions

| Temperature | |
|--|---|
| Ambient temperature on housing | -40...+70°C / -40...+158°F |
| Storage and transport temperature | -40...+80°C / -40...+176°F |
| Process temperature | |
| 316L / Hastelloy C4 (2.4610) | -50...+150°C / -58...+302°F |
| Process temperature with temperature adapter | Option |
| 316L / Hastelloy C4 (2.4610) | -50...+250°C / -58...+482°F |
| enamelled | -50...+200°C / -58...+392°F |
| with ECTFE coating | -50...+150°C / -58...+302°F |
| with PFA coating | -50...+150°C / -58...+302°F |
| Temperature shock | No limitation |
| Process pressure | -1...64 bar / -14.5...928 psi |
| Viscosity (dynamic) | 0.1...10.000 mPa s (requirement: with SG=1) |
| Density | 0.7...2.5 g/cm ² / 0.025...0.09 lbs/in ² ; 0.5...2.5 g/cm ² / 0.018...0.09 lbs/in ² by switching over |

Materials

| Wetted parts | |
|---|--|
| Process fitting – thread | 316L; 2.4602 (Hastelloy C4) |
| Process fitting – flange | 316L; 316L with Hastelloy C4 coating; steel enamelled; 316L with ECTFE coating; 316L with PFA coating |
| Gaskets | Klingersil C-4400 |
| Tuning fork | 316L / 2.4610 (Hastelloy C4) |
| Extension tube $\varnothing 21.3$ mm / $\varnothing 0.84$ " | 316L; 2.4610 (Hastelloy C4); 2.4610 (Hastelloy C4) enamelled; 316L with ECTFE coating; 316L with PFA coating |
| Non-wetted parts | |
| Housing | Plastic PBT (Polyester), Alu-die casting powder-coated, 316L |
| Gasket ring between housing and housing cover | NBR (stainless steel housing), silicone (Alu / plastic housing) |
| Peephole in housing cover | PMMA (Makrolon) |
| Ground terminal | 316L |
| Temperature adapter (Option) | 316L |
| Gastight leadthrough (Option) | 316L / glass |
| Surface quality | |
| Standard (OPTISWITCH 5100 C, 5200 C) | Ra = approx. $3.2 \mu\text{m}$ / 1.26-4" |
| Hygienic version (OPTISWITCH 5150 C, 5250 C) | Ra < $0.8 \mu\text{m}$ / 3.15-5" |
| Coatings | |
| ECTFE | Approx. 0.5...0.8 mm / 0.02...0.03" |
| PFA | Approx. 0.3...0.5 mm / 0.01...0.02" |
| Enamel | Approx. 0.8 mm / 0.03" |

Process connection

| | |
|---|--|
| Thread | G $\frac{3}{4}$ A; $\frac{3}{4}$ NPT; G1 A; 1 NPT |
| Flanges | DIN: \geq DN25; ANSI: \geq 1" |
| Hygienic fittings (OPTISWITCH 5150 C, 5250 C) | Bolting DN 40 PN 40; Tri-Clamp 1"; Tri-Clamp 1 $\frac{1}{2}$ " PN 10; cone DN 25 PN 40; Tuchenhagen Varivent DN 50 PN 10 |

Power Supply

| Relay output | |
|--------------------------------------|--|
| Supply voltage | 20...253 VAC, 50/60 Hz, 20...72 VDC (at U >60 VDC, the ambient temperature can be max. 50°C / 122°F) |
| Power consumption | 1...8 VA (AC); ca. 1.3 W (DC) |
| Transistor output | |
| Supply voltage | 10...55 VDC |
| Power consumption | Max. 0.5 W |
| Contactless electronic switch | |
| Supply voltage | 20...253 VAC, 50/60 Hz, 20...253 VDC |
| Power consumption | Approx. 3 mA (via load circuit) |

| | |
|--|---|
| Two-wire output | |
| Supply voltage | 10...36 VDC (via the signal conditioning instrument) |
| NAMUR output | |
| Supply voltage (standard characteristics) | For connection to amplifier according to NAMUR IEC 60947-5-6, approx. 8.2 V |
| Open-circuit voltage | U_0 approx. 8.2 V |
| Shortcircuit current | I_U approx. 8.2 mA |
| Operating elements | |
| Control lamp | Control lamp (LED) for indication of the switching condition. |
| Density switch (electronics versions: relay, transistor, contactless electronic switch, two-wire, NAMUR outputs) | |
| 0.5 | 0.5...2.5 g/cm ² / 0.018...0.9 oz/in ² |
| 0.7 | 0.7...2.5 g/cm ² / 0.025...0.9 oz/in ² |
| Mode switch (electronics versions: relay output, transistor output, contactless electronic switch) | |
| A | Max. detection or overflow protection |
| B | Min. detection or dry run protection |
| Characteristics reversal (electronics version: NAMUR output) | |
| Max. | Falling characteristics (Low current when immersed) |
| Min. | Rising characteristics (High current when immersed) |
| Electromechanical data | |
| Cable entry/plug (dependent on the version) - Single chamber housing | 1x cable entry M20x1.5 (cable ø5...9 mm), 1x blind stopper M20x1.5; attached 1x cable entry M20x1.5 or 1x cable entry ½ NPT, 1x blind stopper ½ NPT, 1x cable entry ½ NPT |
| Screwed terminals | For wire cross-section up to 1.5 mm ² |

Output

| | |
|--------------------------------------|---|
| Relay output | Relay output (DPDT), 2 floating spdts |
| Turn-on voltage | Min.: 10 mV; max.: 253 VAC/DC |
| Switching current | Min.: 10 µA; max.: 5 A AC, 1 A DC |
| Breaking capacity | Max.: 1250 VA, 50 W |
| Contact material (relay contacts) | AgCdO and Au plated |
| Modes (adjustable) | Min. / max. |
| Delay time | When immersed: approx. 0.5 s; when uncovered: approx. 1 s |
| Transistor output | Floating transistor output, overload and permanently shortcircuit proof |
| Load current | Max. 400 mA |
| Voltage loss | Max. 1 V |
| Turn-on voltage | Max. 55 VDC |
| Blocking current | <10 µA |
| Modes (adjustable) | Min. / max. |
| Delay time | When immersed: approx. 0.5 s; when uncovered: approx. 1 s |
| Contactless electronic switch | Contactless electronic switch |
| Modes (adjustable) | Min. / max. |
| Delay time | When immersed: approx. 0.5 s; when uncovered: approx. 1 s |

| | |
|--|--|
| Two-wire output | |
| Suitable signal conditioning instruments | SU 501 |
| Output signal | |
| Min. mode | Vibrating element uncovered: 16 mA ±1 mA; vibrating element covered: 8 mA ±1 mA |
| Max. mode | Vibrating element uncovered: 8 mA ±1 mA; vibrating element covered: 16 mA ±1 mA |
| Fault signal | <2 mA |
| Modes (adjustable) | Min. / max. (changeover with the signal conditioning instrument) |
| Delay time | When immersed: approx. 0.5 s; when uncovered: approx. 1 s |
| NAMUR output | |
| Two-wire NAMUR output | |
| Current consumption | |
| Falling characteristics | ≥2.2 mA uncovered / ≤1 mA covered |
| Rising characteristics | ≤1 mA uncovered / ≥2.2 mA covered |
| Fault signal | ≤1 mA |
| Necessary processing system | NAMUR processing system according to IEC 60947-5-6 (EN 50227/DIN 19234) |
| Modes (NAMUR output adjustable to falling or rising characteristics) | Min.: rising characteristics (High current when immersed); max.: falling characteristics (Low current when immersed) |

Approvals

| | |
|--|---|
| ATEX | ATEX II 1G, 1/2G, 2G EEx ia IIC T6 ❶ |
| | ATEX II 1/2G, 2G EEx d IIC T6 ❷ |
| | ATEX II 1/2D IP6X T |
| Ship approval | GL & LR |
| WHG | German Federal Water Act ❸ |
| Protection category | IP 66/IP 67 |
| Overvoltage category | III |
| Protection class | |
| Transistor output, two-wire output, NAMUR output | II |
| Relay output, contactless electronic switch | I |
| CE conformity | |
| EMC (89/336/EEC) | Emission EN 61326/A1: 1998 (class B), susceptibility EN 61326: 1997/A1: 1998 |
| LVD (73/23/EEC) | EN 61010-1: 1993 |
| SIL conformity | OPTISWITCH fulfills the requirements of functional safety according to IEC 61508. |

❶ this approval is for 2-wire and NAMUR electronics. It can be combined with either WHG or with ship approval.


❷ only for the plastic-coated aluminium housing with a ½ NPT cable gland. An optional temperature adapter can be used without a gas-tight bushing.

❸ only for contactless electronic switch, relay and transistor electronics.

Dimensions and Weights

OPTISWITCH 4000 - Standard version:

From left to right: thread (M12x1, valve plug DIN 43650 and valve plug DIN 43650 with IDC method of termination)

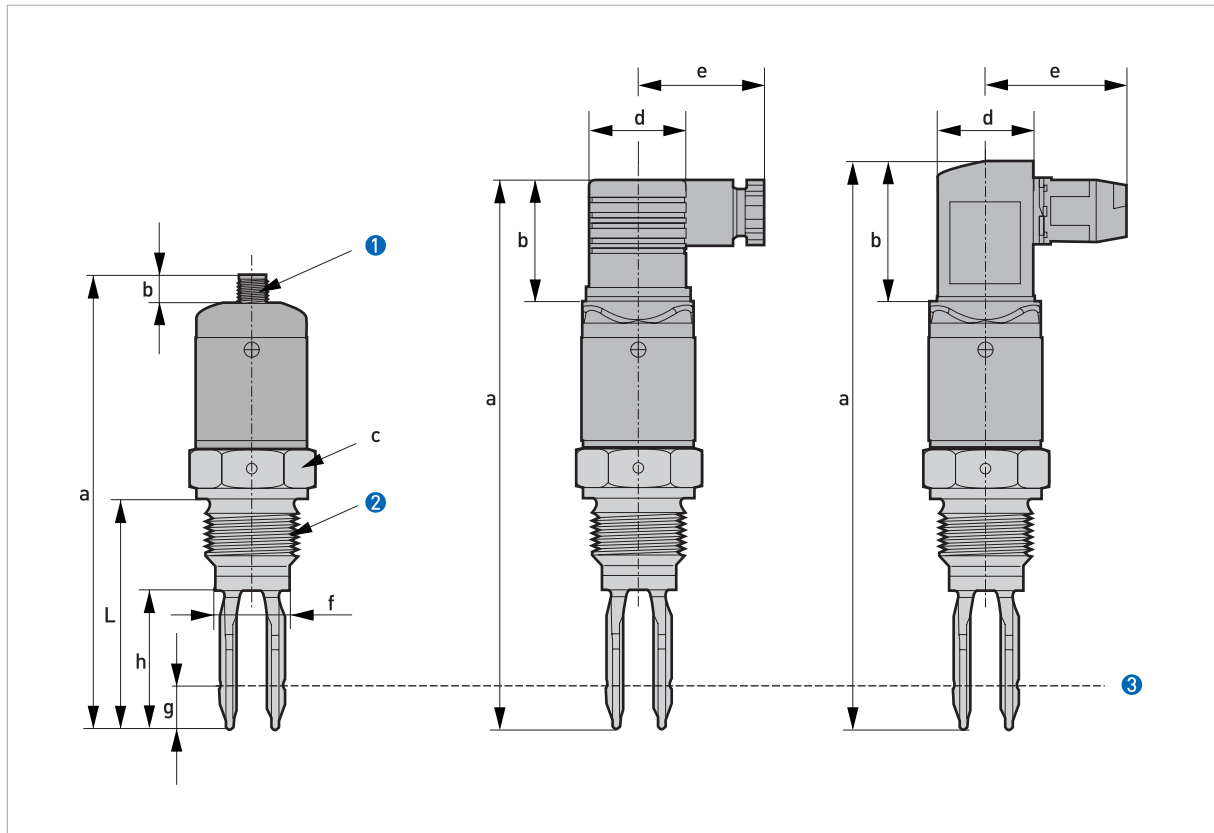

- ① M12x1
- ② Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT, 1 NPT
- ③ Switching point

Dimensions in mm

| | a | b | c | d | e | f | g | h | L |
|--|-------|------|-------|------|------|------|------|------|----------------|
| | [mm] | | | | | | | | |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1) | 132.5 | 10.0 | WS 32 | - | - | 21.3 | 13.0 | 40.0 | L ^① |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650) | 158.0 | 35.0 | - | 27.0 | 36.0 | - | - | - | - |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination) | 165.0 | 42.0 | - | 28.0 | 42.0 | - | - | - | - |

^① with G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT: 66 mm; with G1 A, 1 NPT: 69 mm


Dimensions in inches

| | a | b | c | d | e | f | g | h | L |
|--|----------|------|-------|------|------|------|------|------|----------------|
| | [inches] | | | | | | | | |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1) | 5.22 | 0.39 | WS 32 | - | - | 0.84 | 0.51 | 1.57 | L ^① |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650) | 6.22 | 1.38 | - | 1.06 | 1.42 | - | - | - | - |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination) | 6.50 | 1.65 | - | 1.10 | 1.65 | - | - | - | - |

^① with G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT: 2.6"; with G1 A, 1 NPT: 2.7"

OPTISWITCH 4000 - Hygienic version:

From left to right: Tri-Clamp (valve plug DIN 43650); Bolting (valve plug DIN 43650); SMS 1145 (valve plug DIN 43650)

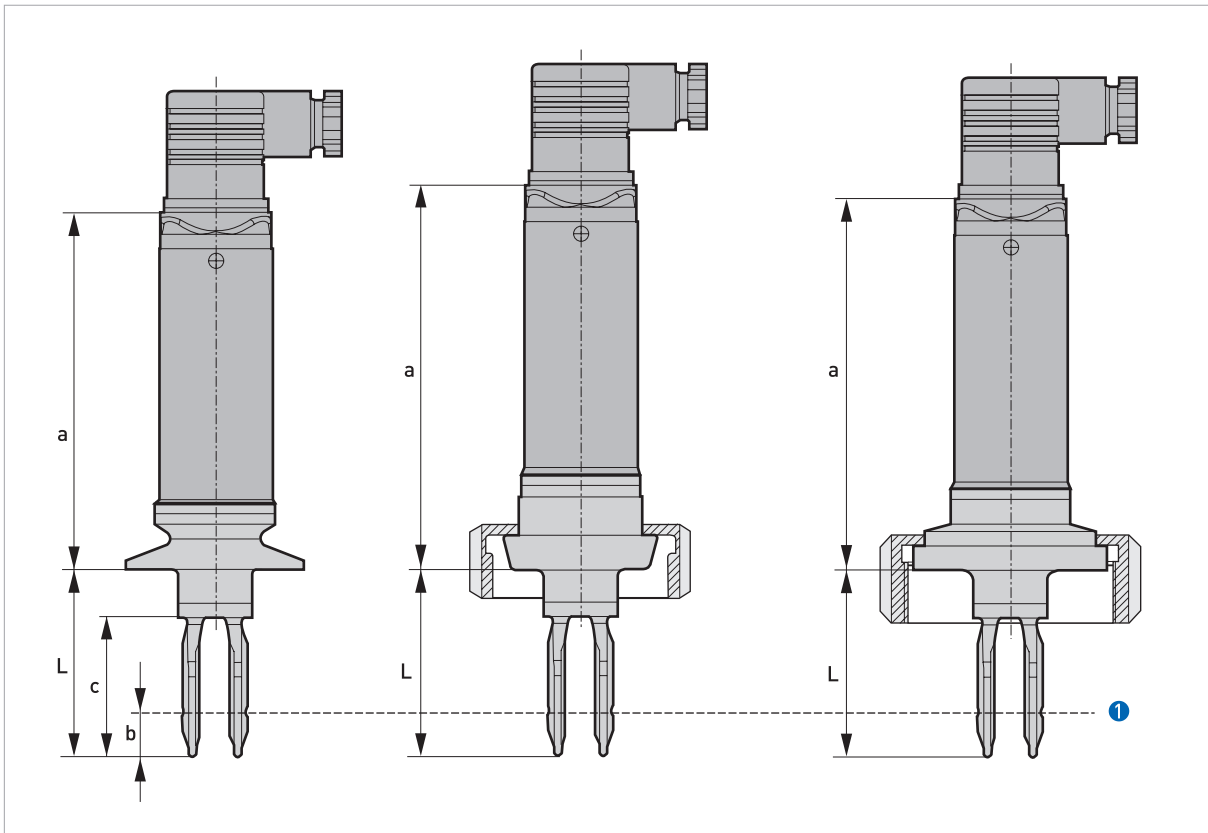

① Switching point

Dimensions in mm

| | a | b | c | L |
|----------------------------------|-------|------|------|-----|
| | [mm] | | | |
| Tri-Clamp (valve plug DIN 43650) | 101.0 | 13.0 | 40.0 | L ① |
| Bolting (valve plug DIN 43650) | 115.0 | - | - | L ① |
| SMS 1145 (valve plug DIN 43650) | 105.0 | - | - | L ① |

① 53 mm


Dimensions in inches

| | a | b | c | L |
|----------------------------------|----------|------|------|-----|
| | [inches] | | | |
| Tri-Clamp (valve plug DIN 43650) | 3.98 | 0.51 | 1.57 | L ① |
| Bolting (valve plug DIN 43650) | 3.53 | - | - | L ① |
| SMS 1145 (valve plug DIN 43650) | 4.13 | - | - | L ① |

① 2.1"

OPTISWITCH 4000 - High temperature version:

From left to right: thread (M12x1, valve plug DIN 43650 and valve plug DIN 43650 with IDC method of termination)

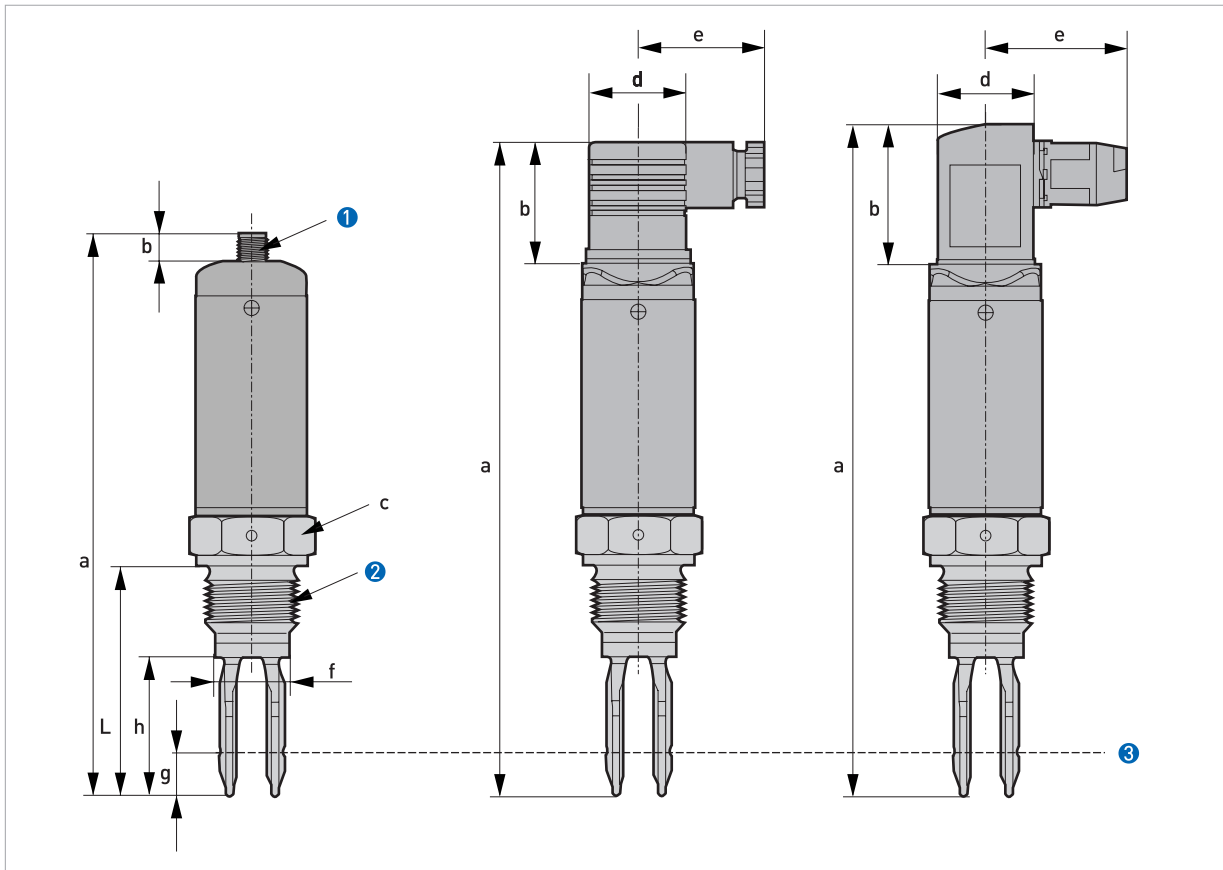

- ① M12x1
- ② Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT, 1 NPT
- ③ Switching point

Dimensions in mm

| | a | b | c | d | e | f | g | h | L |
|--|-------|------|-------|------|------|------|------|------|-----|
| | [mm] | | | | | | | | |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1) | 162.5 | 10.0 | WS 32 | - | - | 21.3 | 13.0 | 40.0 | L ① |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650) | 188.0 | 35.0 | - | 27.0 | 36.0 | - | - | - | - |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination) | 182.0 | 42.0 | - | 28.0 | 42.0 | - | - | - | - |

① with G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT: 66 mm; with G1 A, 1 NPT: 69 mm


Dimensions in inches

| | a | b | c | d | e | f | g | h | L |
|--|----------|------|-------|------|------|------|------|------|-----|
| | [inches] | | | | | | | | |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (M12x1) | 6.40 | 0.39 | WS 32 | - | - | 0.84 | 0.51 | 1.57 | L ① |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650) | 7.40 | 1.38 | - | 1.06 | 1.42 | - | - | - | - |
| Thread G $\frac{3}{4}$ A, G1 A, $\frac{3}{4}$ NPT or 1 NPT (valve plug DIN 43650 with IDC method of termination) | 7.15 | 1.65 | - | 1.10 | 1.65 | - | - | - | - |

① with G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT: 2.6"; with G1 A, 1 NPT: 2.7"

OPTISWITCH 5000 series - Housing

From left to right: Plastic, Stainless steel and Aluminium housing

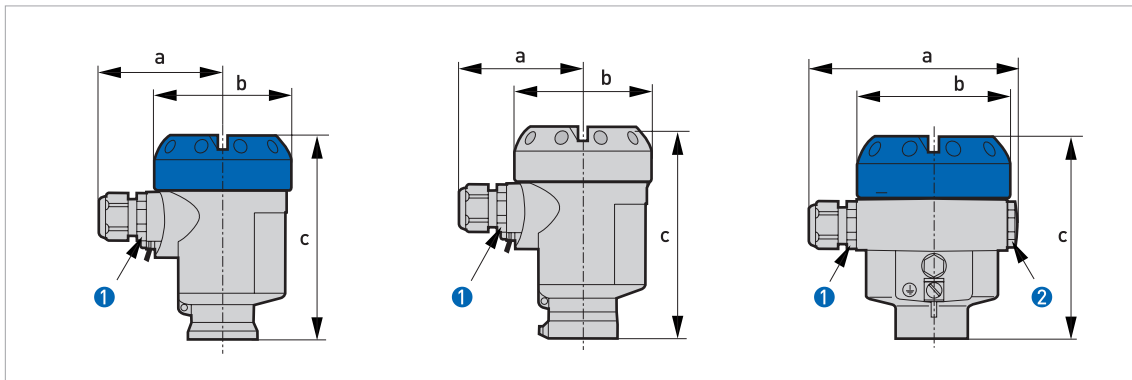


- ① M20x1,5 / ½ NPT
- ② M20x1,5

Dimensions and Weights

| | Dimensions | | | Weight | Dimensions | | | Weight |
|-------------------------|------------|-----|-----|--------|------------|----------|------|--------|
| | [mm] | | | | [kg] | [inches] | | |
| | a | b | c | | a | b | c | |
| Plastic Housing | 69 | Ø77 | 112 | 0.76 | 2.72 | Ø3.0 | 4.41 | 1.68 |
| Stainless steel housing | 69 | Ø77 | 117 | 1.53 | 2.72 | Ø3.0 | 4.61 | 3.37 |
| Aluminium housing | 116 | 84 | 114 | 1.17 | 4.57 | 3.31 | 4.49 | 2.58 |


OPTISWITCH 5100 C, 5150 C, 5200 C, 5250 C - Temperature adapter

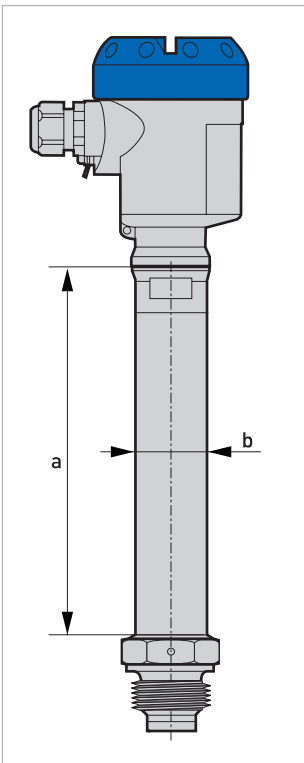

Dimensions in mm and inches

| | a | b | a | b |
|---------------------|------|-----|----------|-------|
| | [mm] | | [inches] | |
| Temperature adapter | 178 | Ø34 | 7 | Ø1.34 |

OPTISWITCH 5100 C, 5150 C

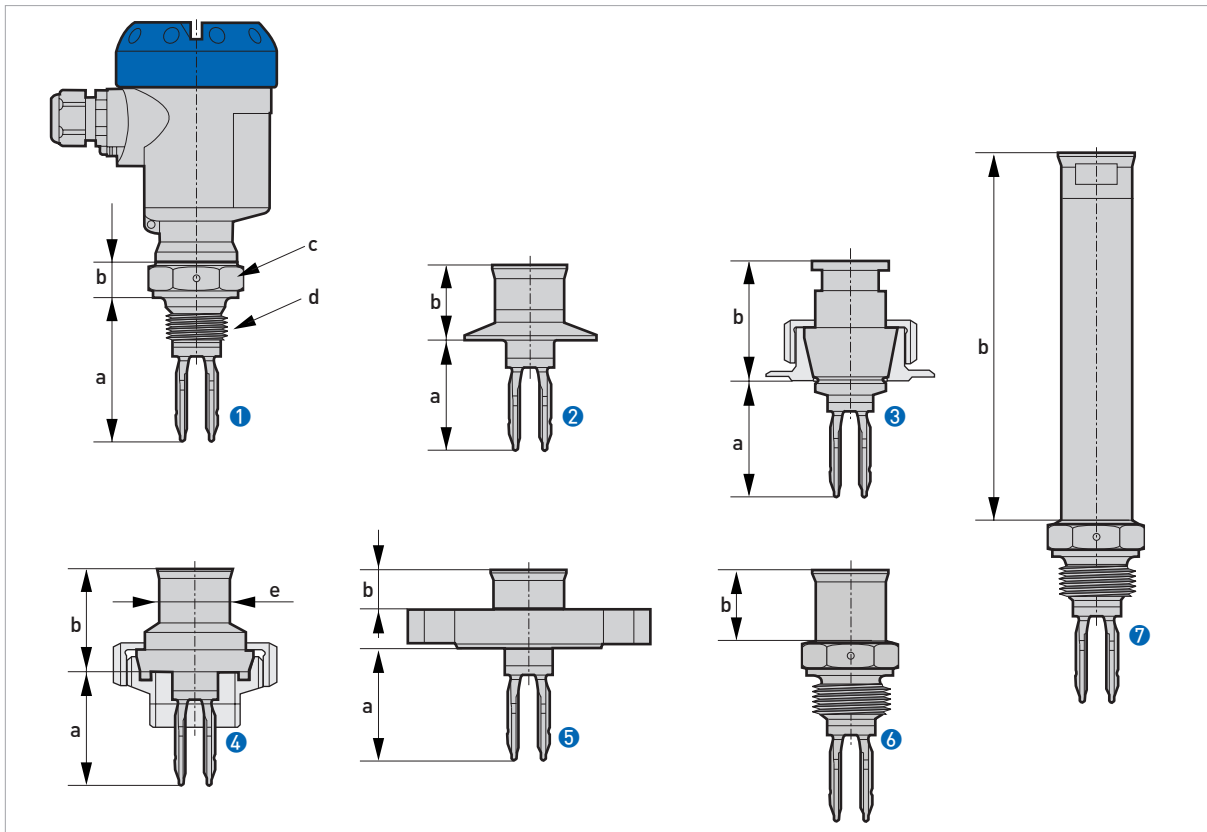

- ① Thread
- ② Tri-Clamp (OPTISWITCH 5150)
- ③ Cone DN 25 (OPTISWITCH 5150)
- ④ Bolting DN 40 (OPTISWITCH 5150)
- ⑤ Flange
- ⑥ Gas-tight leadthrough
- ⑦ Temperature adapter


Dimensions in mm

| | a | b | c | d |
|---------------------------------|------|------|--|---|
| | [mm] | | | |
| Thread | 66 | 18.5 | WS 32 (G $\frac{3}{4}$ A; $\frac{3}{4}$ NPT); WS 41 (G1A; 1 NPT) | G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT; G1A, 1 NPT |
| Tri-Clamp (OPTISWITCH 5150) | 53 | 36 | - | - |
| Cone DN 25 (OPTISWITCH 5150) | 55 | 57 | - | - |
| Bolting DN 40 (OPTISWITCH 5150) | 53 | 50 | \varnothing 33.7 | - |
| Flange | 53 | 19 | - | - |
| Gas-tight leadthrough | - | 34 | - | - |
| Temperature adapter | - | 178 | - | - |

Dimensions in inches

| | a | b | c | d |
|---------------------------------|----------|------|--|---|
| | [inches] | | | |
| Thread | 2.6 | 0.72 | WS 32 (G $\frac{3}{4}$ A; $\frac{3}{4}$ NPT); WS 41 (G1A; 1 NPT) | G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT; G1A, 1 NPT |
| Tri-Clamp (OPTISWITCH 5150) | 2.09 | 1.41 | - | - |
| Cone DN 25 (OPTISWITCH 5150) | 2.17 | 2.24 | - | - |
| Bolting DN 40 (OPTISWITCH 5150) | 2.09 | 1.97 | \varnothing 1.33 | - |
| Flange | 2.09 | 0.75 | - | - |
| Gas-tight leadthrough | - | 1.34 | - | - |
| Temperature adapter | - | 7.0 | - | - |

OPTISWITCH 5200 C, 5250 C

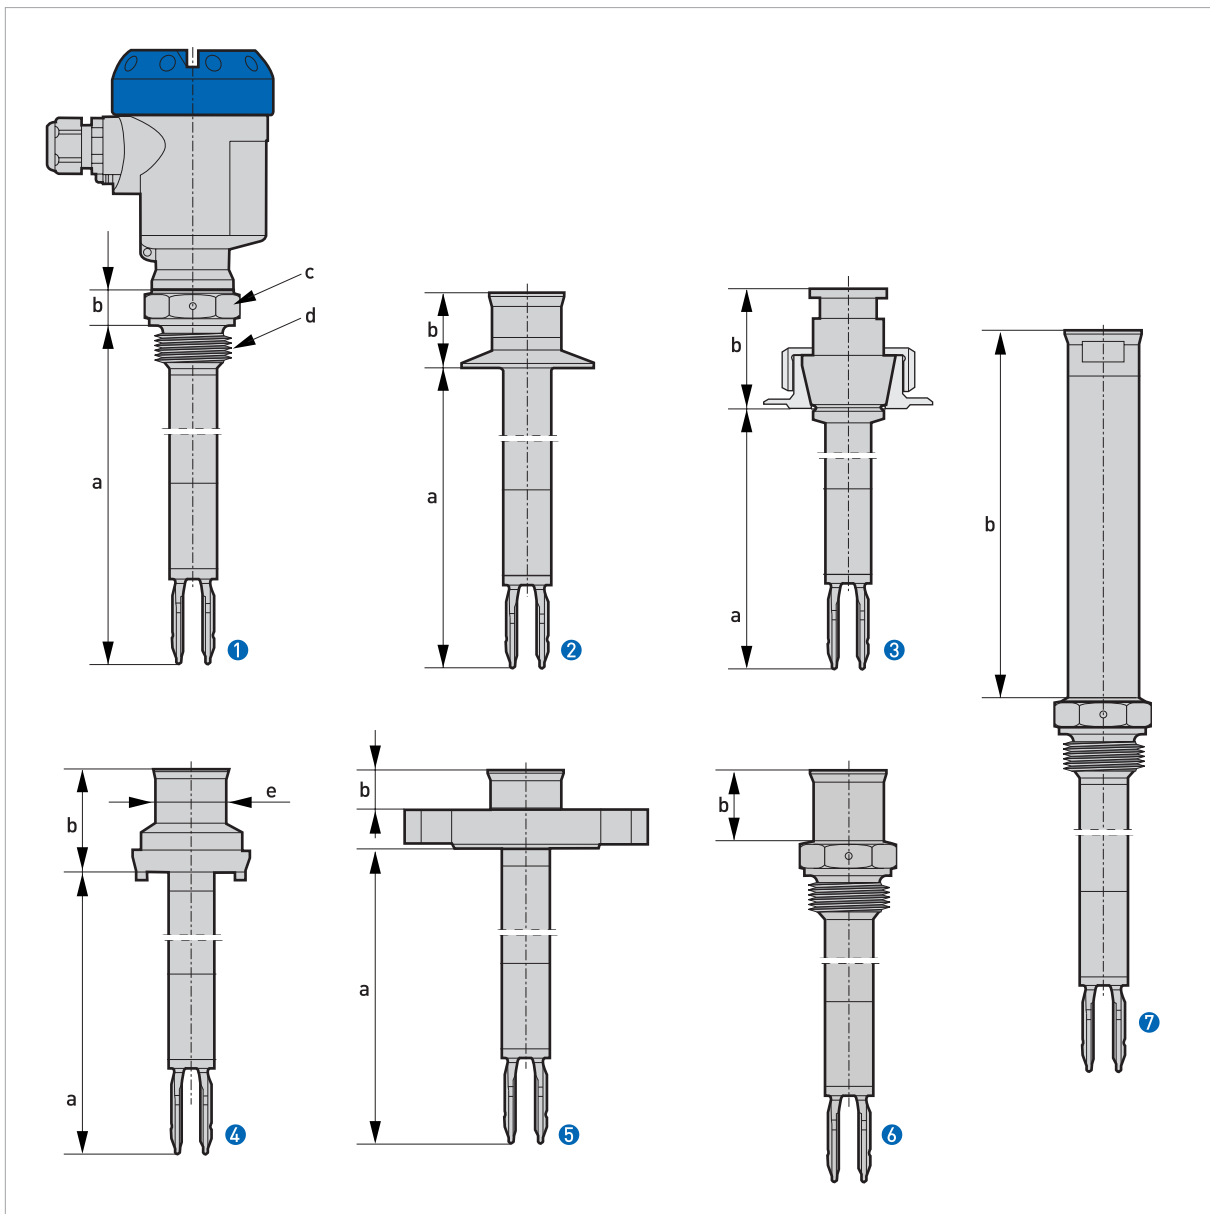

- ① Thread
- ② Tri-Clamp (OPTISWITCH 5250)
- ③ Cone DN 25 (OPTISWITCH 5250)
- ④ Bolting DN 40 (OPTISWITCH 5250)
- ⑤ Flange
- ⑥ Gas-tight leadthrough
- ⑦ Temperature adapter

Dimensions in mm

| | a | b | c | d |
|---------------------------------|------|------|--|---|
| | [mm] | | | |
| Thread | L ① | 18.5 | WS 32 (G $\frac{3}{4}$ A; $\frac{3}{4}$ NPT); WS 41 (G1A; 1 NPT) | G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT; G1A, 1 NPT |
| Tri-Clamp (OPTISWITCH 5250) | L ① | 36 | - | - |
| Cone DN 25 (OPTISWITCH 5250) | L ① | 57 | - | - |
| Bolting DN 40 (OPTISWITCH 5250) | L ① | 50 | \varnothing 33.7 | - |
| Flange | L ① | 19 | - | - |
| Gas-tight leadthrough | - | 34 | - | - |
| Temperature adapter | - | 178 | - | - |


① Ordered sensor length

Dimensions in inches

| | a | b | c | d |
|---------------------------------|----------|------|--|---|
| | [inches] | | | |
| Thread | L ① | 0.72 | WS 32 (G $\frac{3}{4}$ A; $\frac{3}{4}$ NPT); WS 41 (G1A; 1 NPT) | G $\frac{3}{4}$ A, $\frac{3}{4}$ NPT; G1A, 1 NPT |
| Tri-Clamp (OPTISWITCH 5250) | L ① | 1.41 | - | - |
| Cone DN 25 (OPTISWITCH 5250) | L ① | 2.24 | - | - |
| Bolting DN 40 (OPTISWITCH 5250) | L ① | 1.97 | \varnothing 1.33 | - |
| Flange | L ① | 0.75 | - | - |
| Gas-tight leadthrough | - | 1.34 | - | - |
| Temperature adapter | - | 7.0 | - | - |

① Ordered sensor length

Notes

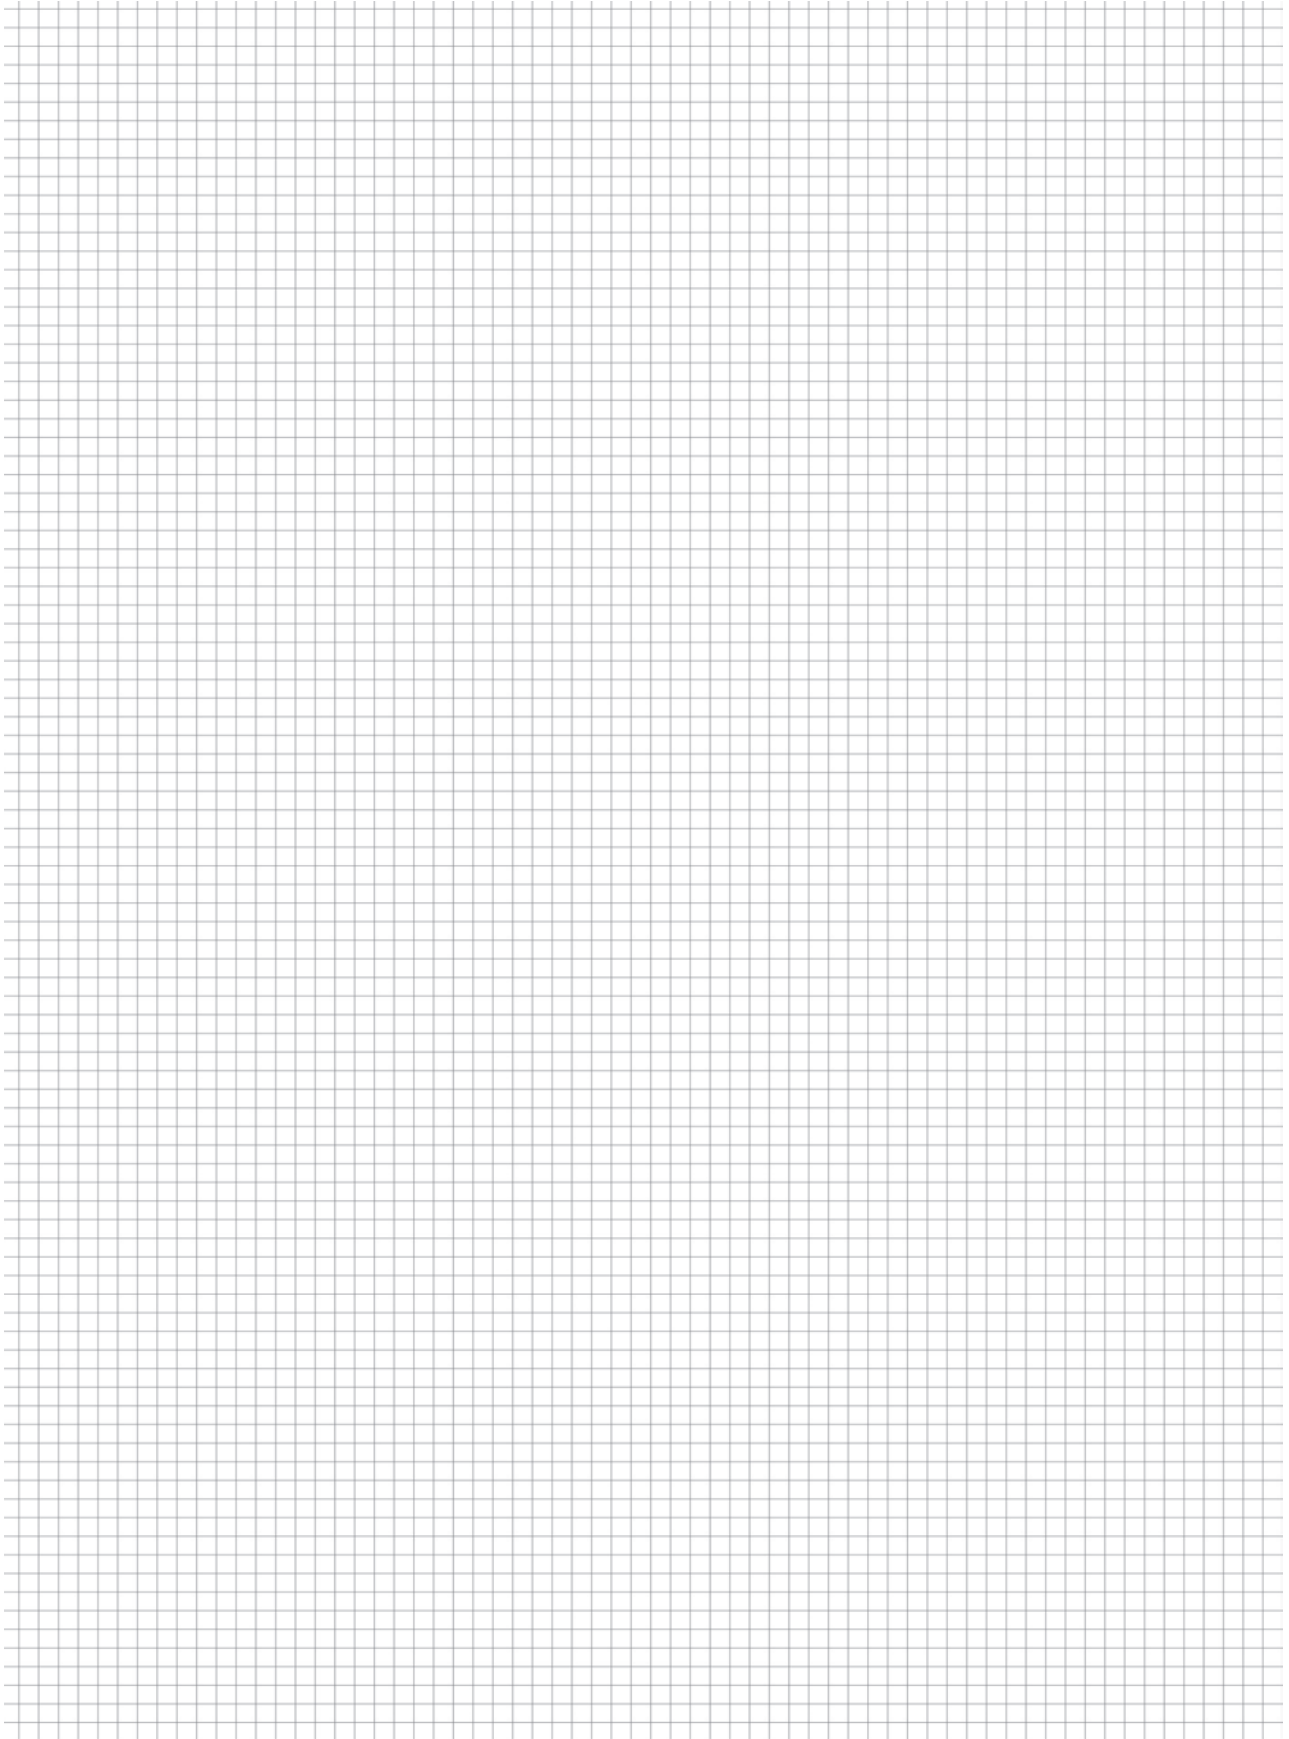A large grid of graph paper for taking notes, consisting of a uniform pattern of small squares.

Notes

A large grid of graph paper for taking notes, consisting of 20 columns and 40 rows of small squares.

KROHNE Product Overview

- Electromagnetic flowmeters
- Variable area flowmeters
- Mass flowmeters
- Ultrasonic flowmeters
- Vortex flowmeters
- Flow controllers
- Level measuring instruments
- Pressure gauges
- Temperature measuring instruments
- Water solutions & analysis
- Oil and gas turnkey solutions

Addresses:

Germany

Northern sales office

KROHNE Messtechnik GmbH & Co. KG
Bremer Str. 133
D-21073 Hamburg
Phone: +49 (0)40 767 3340
Fax: +49 (0)40 767 33412
nord@krohne.de
ZIP code: 10000 - 29999, 49000 - 49999

Western and middle sales office

KROHNE Messtechnik GmbH & Co. KG
Ludwig-Krohne-Straße
D-47058 Duisburg
Phone: +49 (0)203 301 416
Fax: +49 (0)203 301 10416
west@krohne.de
ZIP code: 30000 - 34999, 37000 - 48000, 50000 - 53999, 57000 - 59999, 98000 - 99999

Southern sales office

KROHNE Messtechnik GmbH & Co. KG
Landsberger Str. 392
D-81241 Munich
Phone: +49 (0)89 121 5620
Fax: +49 (0)89 129 6190
sued@krohne.de
ZIP code: 0 - 99999, 80000 - 89999, 90000 - 97999

Southwestern sales office

KROHNE Messtechnik GmbH & Co. KG
Rüdesheimer Str. 40
D-65239 Hochheim/Main
Phone: +49 (0)6146 827 30
Fax: +49 (0)6146 827 312
rhein-main@krohne.de
ZIP code: 35000 - 36999, 54000 - 56999, 60000 - 79999

Instrumentation and control equipment catalog

TABLAR Messtechnik GmbH
Ludwig-Krohne-Straße 5
D-47058 Duisburg
Phone: +49 (0)2 03 305 880
Fax: +49 (0)2 03 305 8888
kontakt@tablar.de www.tablar.de

KROHNE sales companies

International

Australia

KROHNE Australia Pty Ltd
Quantum Business Park 10/287
Victoria Rd Rydalmere NSW 2116
Phone: +61 2 8846 1700
Fax: +61 2 8846 1755
krohne@krohne.com.au

Austria

KROHNE Gesellschaft m.b.H.
Modecenterstraße 14
A-1030 Vienna
Phone: +43 (0)1/203 45 32
Fax: +43 (0)1/203 45 32 99
info@krohne.at

Belgium

KROHNE Belgium N.V.
Brusselstraat 320
B-1702 Groot Bijgaarden
Phone: +32 (0)2 4 66 00 10
Fax: +32 (0)2 4 66 08 00
krohne@krohne.be

Brazil

KROHNE Conaut Controles
Automaticos Ltda.
Estrada Das Águas Espraiadas, 230
C.P. 56 06835 - 080 EMBU - SP
Phone: +55 (0)11-4785-2700
Fax: +55 (0)11 4785-2768
conaut@conaut.com.br

China

KROHNE Measurement Instruments
[Shanghai] Co. Ltd., [KMIC]
Room 1501
1033 Zhaoyang Road
Shanghai 200030
Phone: +86 21 6487 9611
Fax: +86 21 6438 7110
info@krohne-asia.com

Czech Republic

Krohne CZ, spol. s r.o.
Soběsická 156
63800 Brno
Phone: +420 (0)545.242.627
Fax: +420 (0)545.220.093
brno@krohne.cz

France

KROHNE S.A.S.
Les Ors BP 98
F-26103 ROMANS Cedex
Phone: +33 (0)4 75 05 44 00
Fax: +33 (0)4 75 05 00 48
info@krohne.fr

Great Britain

KROHNE Ltd.
Rutherford Drive
Park Farm Industrial Estate
Wellingborough
Northants NN8 6AE
Phone: +44 (0)19 33 408 500
Fax: +44 (0)19 33 408 501
info@krohne.co.uk

CIS

Kanex KROHNE Engineering AG
Business-Centre Planeta
Office 404 ul.
Marxistskaja 3
109147 Moscow/Russia
Phone: +7 (0)095 911 7165
Fax: +7 (0)095 742 8873
krohne@dol.ru

India

Krohne Marshall Ltd.
A-34/35, M.I.D.C. Industrial Area,
H-Block
Pimpri Poona 411018
Phone: +91 (0)202 744 2020
Fax: +91 (0)202 744 2020
pcui@vsnl.net

Iran

KROHNE Liaison Office
North Sohrevardi Ave. 26,
Sarmad St., Apt. #9
Tehran 15539
Phone: +9821 8874 5973
Fax: +9821 8850 1268
krohne@krohneiran.com

Italy

KROHNE Italia Srl.
Via V. Monti 75
I-20145 Milan
Phone: +39 02 4300 661
Fax: +39 02 4300 6666
info@krohne.it

Korea

KROHNE Korea
Room 508 Miwon Bldg 43
Yoido-Dong Youngdeungpo-Ku
Seoul, Korea
Phone: 00-82-2-782-1900
Fax: 00-82-2-780-1749
mail@krohne.co.kr

Netherlands

KROHNE Nederland B.V.
Kerkeplaat 14
NL-3313 LC Dordrecht
Phone: +31 (0)78 630 6200
Fax: +31 (0)78 630 6405
Service Direct: +31 (0)78 630 6222
info@krohne.nl

Norway

KROHNE Norway A.S.
Ekholtveien 114
NO-1521 Moss
Phone: +47 (0)69 264 860
Fax: +47 (0)69 267 333
postmaster@krohne.no

Poland

KROHNE Polska Sp.z.o.o.
ul. Stary Rynek Oliwski 8a
80-324 Gdansk
Phone: +48 (0)58 520 9211
Fax: +48 (0)58 520 9212
info@krohne.pl

Switzerland

KROHNE AG
Uferstr. 90
CH-4019 Basel
Phone: +41 (0)61 638 30 30
Fax: +41 (0)61 638 30 40
info@krohne.ch

Singapore

Tokyo Keiso - KROHNE (Singapore)
Pte. Ltd.
14, International Business Park,
Jurong East
Chiyoda Building, #01-01/02
Singapore 609922
Phone: (65) 6567 4548
Fax : (65) 6567 9874
tks@tokyokeiso-krohne.com.sg

Republic of South Africa

KROHNE Pty. Ltd.
Bushbuck Close
Corporate Park South
Midrand, Gauteng
P.O. Box 2069
Midrand, 1685
Tel.: +27 (0)11 314 1391
Fax: +27 (0)11 314 1681
midrand@krohne.co.za

Spain

I.I. KROHNE IBERIA, S.r.l.
Polígono Industrial Nilo
Calle Brasil, nº. 5
28806 Alcalá de Henares Madrid
Phone: +34 (0)91 883 2152
Fax: +34 (0)91 883 4854
krohne@krohne.es

USA

KROHNE, Inc.
7 Dearborn Road
Peabody, MA 01960
Phone: +1 (800) FLOWING
Phone: +1 (978) 535 6060 (in MA)
info@krohne.com

Representatives

Algeria
Argentina
Cameroon
Canada
Chile
Columbia
Croatia
Denmark
Ecuador
Egypt
Finland
Gabon
Ghana
Greece
Hong Kong
Hungary
Indonesia
Iran
Ireland
Israel
Ivory Coast
Japan
Jordan
Kuwait
Libya
Lithuania
Malaysia
Mauritius
Mexico
Morocco
New Zealand
Peru
Portugal
Romania
Saudi Arabia
Senegal
Slovakia
Slovenia
Sweden
Taiwan
Thailand
Tunisia
Turkey
Venezuela
Yugoslavia

Other countries

KROHNE Messtechnik GmbH & Co. KG
Ludwig-Krohne-Str. 5
D-47058 Duisburg
Phone: +49 (0)203 301 0
Fax: +49 (0)203 301 389
export@krohne.de