

# ROTOSH



# SMART

DESCALES  
WASHES  
DRAINS




Height adjustment

Insertion and fixing

Turn over


Washing

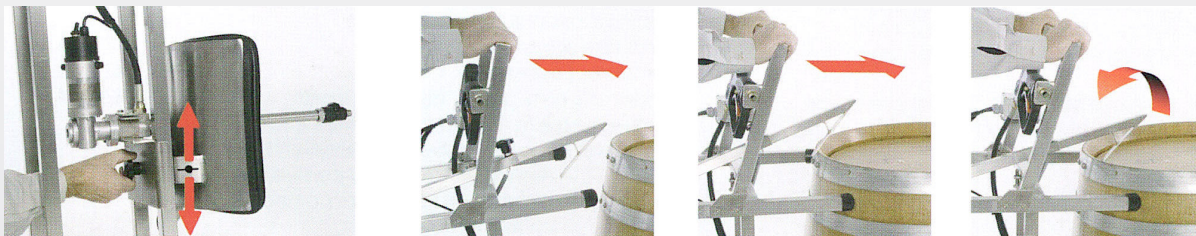

**NORTH  
AMERICA**  
First Choice When Quality Matters

# ROTOSH SMART

## Electrical panel

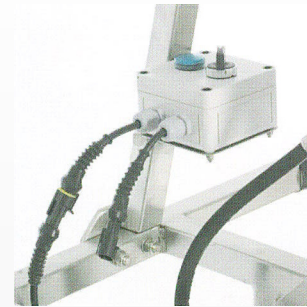


- Waterproof panel
- on/off switch
- Pilot light
- Connection to electrical mains c.c. 12 volts.

## Connections to pressure washer




- Connection 3/8 G-M
- Open/closed device
- Insulated grip

## Exhaust water conveyor

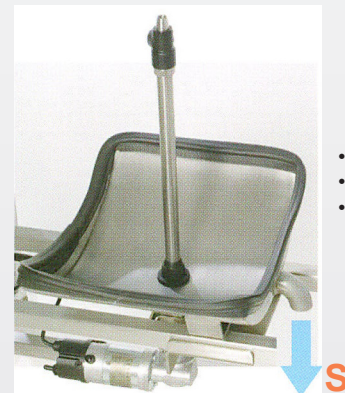

- Stainless steel with lip-seal protection
- Discharge connection S Ø 30 mm
- Disposal of tartates-any dimension

## Barrique cleaning electric rotating washing

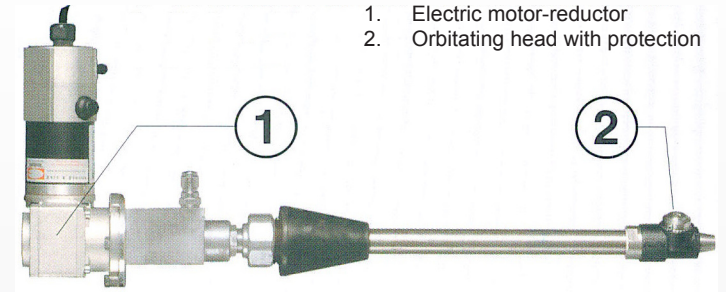


1. Electric motor-reductor
2. Orbitating head with protection

## How it Works

- Spray turret can be fitted through reduced tank opening with a minimum diameter of 43 mm.
- 100% Stainless steel AISI 304 construction.
- Complete inside cleaning cycle in 36" with 62 spray-nozzle turns.
- For a good cleaning operation it requires two revolution cycles for a total of 1' 12".

## Technical Data

|                           |  |
|---------------------------|--|
| Recommended pressure      | 1160 PSI   |
| Max pressure              | 2030 PSI   |
| Max flow rate             | 6.6 GPM  |
| Max temperature           | 176° F   |
| Electric motor            | 12 v. cc.  |
| Power supply              | 230 V 50Hz - 12 V. cc.   |
| Nozzle rod rotating speed | 52 RPM   |
| Cable                     | 10 mt long with waterproof connections   |
| Nozzles:                  | - 2 pcs. mounted for pump up to 4 GPM<br>- 2 spare pcs. for pump over 4 GPM<br>- Allen screw spanner |
| Weight:                   | 61.64 lbs.   |
| Pump:                     | Units available*<br>Please call  |

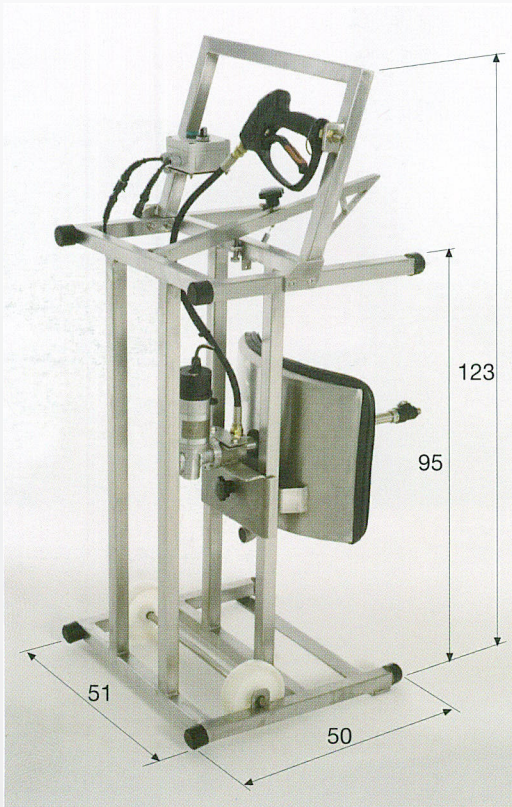

**NORTH AMERICA**  
First Choice When Quality Matters

www.arnorthamerica.com • e-mail: info@arnorthamerica.com  
140 81st Avenue Northeast - Fridley, Minnesota 55432  
Phone: 763-398-2008 • Fax: 763-398-2009