


CLEVIS PINS

785-392-3017 FAX 785.392.2845

REVISED 09-02

STANDARDIZED SIZE

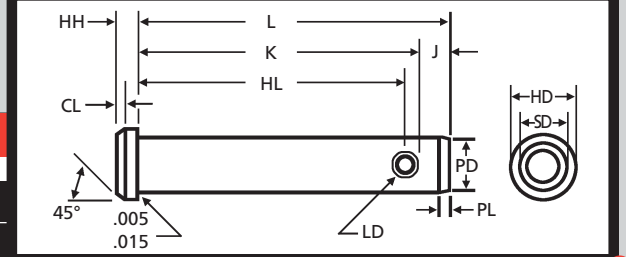

SAE STANDARD	
MANUFACTURER CROSS-REFERENCE	
ITW/Bee-Leitzke	11-SAE

CLPSAE	Nominal (SD)	Length (L)	Shank Diameter (SD) Max / Min	WEIGHT Lbs. per 100 Pieces	MATERIALS			Use With
	DIAMETER	LENGTH			Plain "CLPSAE-"	Zinc Clear "CLPSAEZ-"	Zinc Yellow "CLPSAEY-"	
-0187	3/16	.58	.186 / .181	0.59				BP-223 BP-213 BP-203 BP-211 BP-210
-0250	1/4	.77	.248 / .243	1.43				
-0312	5/16	.94	.311 / .306	2.30				
-0375	3/8	1.06	.373 / .368	3.80				
-0437	7/16	1.19	.436 / .431	6.40				
-0500	1/2	1.36	.496 / .491	8.55				
-0625	5/8	1.61	.621 / .616	17.00				
-0750	3/4	1.91	.746 / .741	27.50				
-0875	7/8	2.16	.871 / .866	43.00				
-1000	1	2.41	.996 / .991	63.00				

BRIDGE PINS BEGIN PAGE 72.


DIMENSIONS

Size	Head Diameter (HD)		Head Height (HH)		Chamfer Length (CL)	Hole Diameter (LD)		Point Diameter (PD)		Head to Center of Hole (HL)		End to Center (J)	Head to Edge of Hole (K)		Point Length (PL)	
	Max	Min	Max	Min	+0.01	Max	Min	Max	Min	Max	Min	Basic	Max	Min	Max	Min
3/16	.32	.30	.07	.05	.02	.088	.073	.15	.14	.504	.484	.09	.548	.520	.055	.035
1/4	.38	.36	.10	.08	.03	.088	.073	.21	.20	.692	.672	.09	.763	.708	.055	.035
5/16	.44	.42	.10	.08	.03	.119	.104	.26	.25	.832	.812	.12	.892	.864	.071	.049
3/8	.51	.49	.13	.11	.03	.119	.104	.33	.32	.958	.938	.12	1.018	.990	.071	.049
7/16	.57	.55	.16	.14	.04	.119	.104	.39	.38	1.082	1.062	.12	1.142	1.114	.071	.049
1/2	.63	.61	.16	.14	.04	.151	.136	.44	.43	1.223	1.203	.15	1.298	1.271	.089	.063
5/8	.82	.80	.21	.19	.06	.151	.136	.56	.55	1.473	1.453	.15	1.548	1.521	.089	.063
3/4	.94	.92	.26	.24	.07	.182	.167	.68	.67	1.739	1.719	.18	1.830	1.802	.110	.076
7/8	1.04	1.02	.32	.30	.09	.182	.167	.80	.79	1.989	1.969	.18	2.080	2.052	.110	.076
1	1.19	1.17	.35	.33	.10	.182	.167	.93	.92	2.239	2.219	.18	2.330	2.302	.110	.076

DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION
<p>CLP SAE</p> <p>Cornpicker pin manufactured to dimensional standards established by the Society of Automotive Engineers (SAE) only one length per diameter.</p> <p>SAE STANDARD</p>	<p>COMMON</p>	<ol style="list-style-type: none"> Verify flat head pin with a hole drilled at opposite end. Measure diameter (D). Measure length (L). Find the part in the chart above. <p>TYPICAL PART NUMBER SEQUENCE: CLPSAEZ-0250 is a 1/4" x .770" zinc clear SAE clevis pin.</p>	<p>As a fishing line weight.</p>

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.

USE WITH E-CLIP, X-RING, OR HAIRPIN

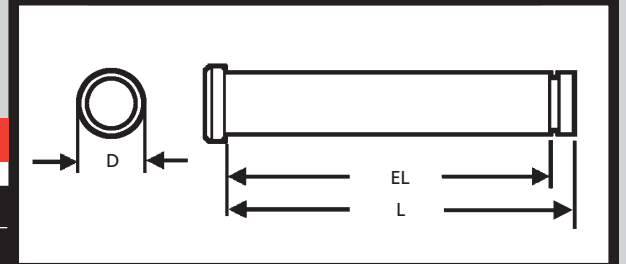

GROOVED	
MANUFACTURER CROSS-REFERENCE	
ITW/Bee-Leitzke	
Made to Order	

CALL FOR PRICING AND AVAILABILITY.

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL PLANT FOR QUANTITY DISCOUNTS