



SELF-LOCKING PINS

785-392-3017 FAX 785.392.2845

REVISED 06-04
www.huyett.com

PRECISION GROUND

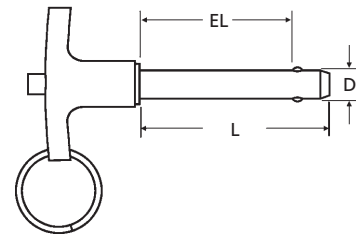

T-HANDLE

MANUFACTURER CROSS-REFERENCE

Carr Lane	BLPT	Reid Tool	BLT
Avibank	BLTA	Lockwell	LGT


PLT	Nominal Diameter (D)	Effective Length (EL)	Overall Length (L)	WEIGHT Lbs. per 100 Pieces	MATERIAL			
	DIAMETER	LENGTH			Alloy Steel "PLT-"	17-4 Stainless "PLTS-"	300 Stainless "PLTS3-"	
-0187-0500	3/16	.1885	1/2	.760	8.28			
-0187-0750			3/4	1.010	8.52			
-0187-1000			1	1.260	8.75			
-0187-1250			1-1/4	1.510	8.98			
-0187-1500			1-1/2	1.760	9.22			
-0187-2000			2	2.260	9.69			
-0187-2500			2-1/2	2.760	10.16			
-0187-3000			3	3.260	10.63			
-0250-0500	1/4	.2485	1/2	.790	11.72			
-0250-0750			3/4	1.040	12.11			
-0250-1000			1	1.290	12.50			
-0250-1250			1-1/4	1.540	12.89			
-0250-1500			1-1/2	1.790	13.28			
-0250-1750			1-3/4	2.040	13.67			
-0250-2000			2	2.290	14.06			
-0250-2500			2-1/2	2.790	14.84			
-0250-3000	5/16	.3095 / .3110	3	3.290	15.63			
-0250-3500			3-1/2	3.790	16.41			
-0250-4000			4	4.290	17.19			
-0312-0500			1/2	.830	13.75			
-0312-0750			3/4	1.080	14.38			
-0312-1000			1	1.330	15.00			
-0312-1250			1-1/4	1.580	15.63			
-0312-1500			1-1/2	1.830	16.25			
-0312-2000	3/8	.3720 / .3735	2	2.330	17.50			
-0312-2500			2-1/2	2.830	18.75			
-0312-3000			3	3.330	20.00			
-0312-3500			3-1/2	3.830	21.25			
-0312-4000			4	4.330	22.50			
-0312-4500			4-1/2	4.830	23.75			
-0312-5000			5	5.330	25.00			
-0312-6000			6	6.330	27.50			
-0375-0500			1/2	.865	16.56			
-0375-1000			1	1.365	18.13			
-0375-1250			1-1/4	1.615	18.91			
-0375-1500			1-1/2	1.865	19.69			
-0375-1750			1-3/4	2.115	20.47			
-0375-2000			2	2.365	21.25			
-0375-2250			2-1/4	2.615	22.03			

DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION
<p>PLT</p> <p>T-handle pins provide comfortable, firm grip for quick release of pin from application site. Especially helpful in positioning or repetitive use.</p> <p>T-HANDLE</p>	<p>COMMON</p>	<ol style="list-style-type: none"> 1. Verify T-shaped handle. 2. Measure diameter (D). 3. Measure effective length (EL). 4. Find the part in the chart above. <p>TYPICAL PART NUMBER SEQUENCE: PLTS-0250-2500 is a 1/4" x 2-1/2" 17-4 stainless T-handle pin.</p>	<p>Easily secured with a tether to prevent pin loss.</p>

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.



SEE ADVISORY ON PAGE 51.




L-HANDLE PINS LISTED ON PAGE 48-49. →

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL PLANT FOR QUANTITY DISCOUNTS

AVAILABLE IN THREE GRADES


BOX 232 • MINNEAPOLIS, KS • 67467





T-HANDLE

MANUFACTURER CROSS-REFERENCE

Carr Lane	BLPT	Reid Tool	BLT
Avibank	BLTA	Lockwell	LGT



PLT	Nominal Diameter (D)	Effective Length (EL)	Overall Length (L)	WEIGHT	MATERIAL						
	DIAMETER	LENGTH		Lbs. per 100 Pieces	Alloy Steel "PLT-"	17-4 Stainless "PLTS-"	300 Stainless "PLTS3-"				
-0375-2500	3/8	.3720 / .3735	2-1/2	2.865	22.81						
-0375-3000			3	3.365	24.38						
-0375-3500			3-1/2	3.865	25.94						
-0375-4000			4	4.365	27.50						
-0375-4500			4-1/2	4.865	29.06						
-0375-5000			5	5.365	30.63						
-0375-5500	5-1/2	5.865	32.19								
-0375-6000	6	6.365	33.75								
-0437-1000	7/16	.4345 / .4360	1	1.380	22.00						
-0437-1500			1-1/2	1.880	23.94						
-0437-2000			2	2.380	25.88						
-0437-2500	2-1/2	2.880	27.81								
-0500-1000	1/2	.4970 / .4985	1	1.460	26.25						
-0500-1250			1-1/4	1.710	27.50						
-0500-1500			1-1/2	1.960	28.75						
-0500-1750			1-3/4	2.210	30.00						
-0500-2000			2	2.460	31.25						
-0500-2500			2-1/2	2.960	33.75						
-0500-3000			3	3.460	36.25						
-0500-3500			3-1/2	3.960	38.75						
-0500-4000			4	4.460	41.25						
-0500-4500			4-1/2	4.960	43.75						
-0500-5000			5	5.460	46.25						
-0500-5500			5-1/2	5.960	48.75						
-0500-6000	6	6.460	51.25								
-0625-1500	5/8	.6220 / .6235	1-1/2	2.080	37.66						
-0625-2000			2	2.580	41.88						
-0625-2500			2-1/2	3.080	46.09						
-0625-3000			3	3.580	50.31						
-0625-3500			3-1/2	4.080	54.53						
-0625-4000			4	4.580	58.75						
-0625-4500	4-1/2	5.080	62.97								
-0625-5000	5	5.580	67.19								
-0625-5500	5-1/2	6.080	71.41								
-0625-6000	6	6.580	75.63								
-0750-1500	3/4	.7470 / .7485	1-1/2	2.170	48.13						
-0750-2000			2	2.670	55.31						
-0750-2500			2-1/2	3.170	62.50						
-0750-3000			3	3.670	69.69						
-0750-3500			3-1/2	4.170	76.88						
-0750-4000			4	4.670	84.06						
-0750-4500	4-1/2	5.170	91.25								
-0750-5000	5	5.670	98.44								
-1000-2000	1	.9970 / .9985	2	2.890	99.63						
-1000-2500			2-1/2	3.390	110.47						
-1000-3000			3	3.890	121.31						
-1000-4000			4	4.890	143.00						
-1000-5000			5	5.890	164.69						
-1000-6000	6	6.890	186.38								



MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL PLANT FOR QUANTITY DISCOUNTS

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above. Prices, materials, tolerances, and grades subject to change without notice.