




See page 56
Non-PED statement

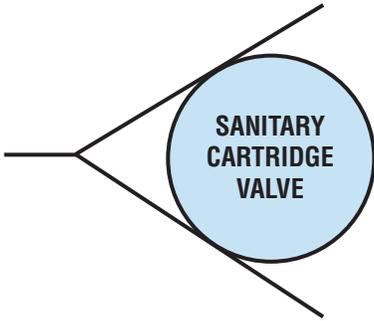


Valve shown in ferrules.
Ferrules and clamp not included.

The **Sanitary Cartridge (SC)** valve is a stainless steel check valve for use with new or existing sanitary ferrules. The SC design seals on the ID of ferrules with replaceable food grade seals (Standard is FDA EPDM). The valve fits the Alfa Laval Inc. Bevel Seat and Tri-Clamp® fittings, Waukesha Cherry-Burrell® Q-Line and S-Line fittings and others with ID dimensions equal to the “F” dimensions listed below (ferrules not included). The compact SC design fits inside a single fitting and requires no additional space in the line. Its size makes it extremely economical when compared to full-bodied valves.

For applications requiring a 3-A compliant valve, see our 3S series on page 23.

The SC valve can also be used as a low pressure relief valve or vacuum breaker by using the desired spring settings.

Note: USP Class VI o-rings can be supplied with certification.

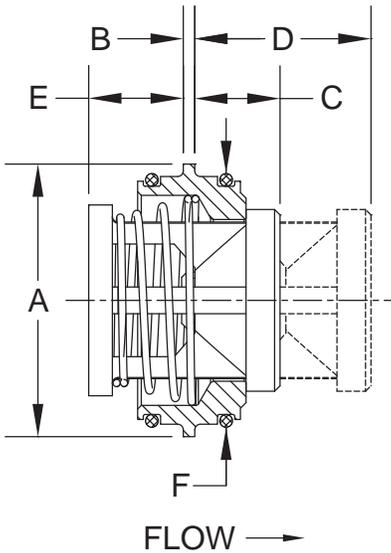

Line Size	Size Code	A	B	C ①	D ②	E	F ③	Orifice Diameter
3/4	F	3/4	1/16	0.44	0.78	0.28	0.620	0.348
1	H	1	1/16	0.53	0.89	0.30	0.870	0.464
1-1/2	J	1-1/2	1/16	0.53	1.06	0.63	1.370	0.890
2	K	2	1/16	0.66	1.39	0.66	1.870	1.135
2-1/2	L	2-1/2	1/16	0.69	1.56	0.88	2.370	1.385
3	M	3	1/16	0.75	1.97	1.25	2.870	2.025
4	N	4	1/16	0.88	2.41	1.63	3.834	2.560

- ① Maximum nominal dimension for valve closed.
- ② Maximum nominal dimension for a fully open valve with no spring.
- ③ Valves are designed to function with fittings having these internal diameters. (±0.005)

Body Material ④	Line Size	Non-Shock Pressure-Temperature Rating ⑤
316/316L Stainless Steel (SS)	3/4" - 1-1/2"	1000 PSIG @ 100°F
	2" - 4"	725 PSIG @ 100°F

④ See page 54 for material grade information.

⑤ Consult the factory for applications where higher pressure or temperature is required.

