




Series
SSM
&
SSB

All Metal Flowmeter

Available in Brass or Stainless Steel for Industrial Environment

Flow

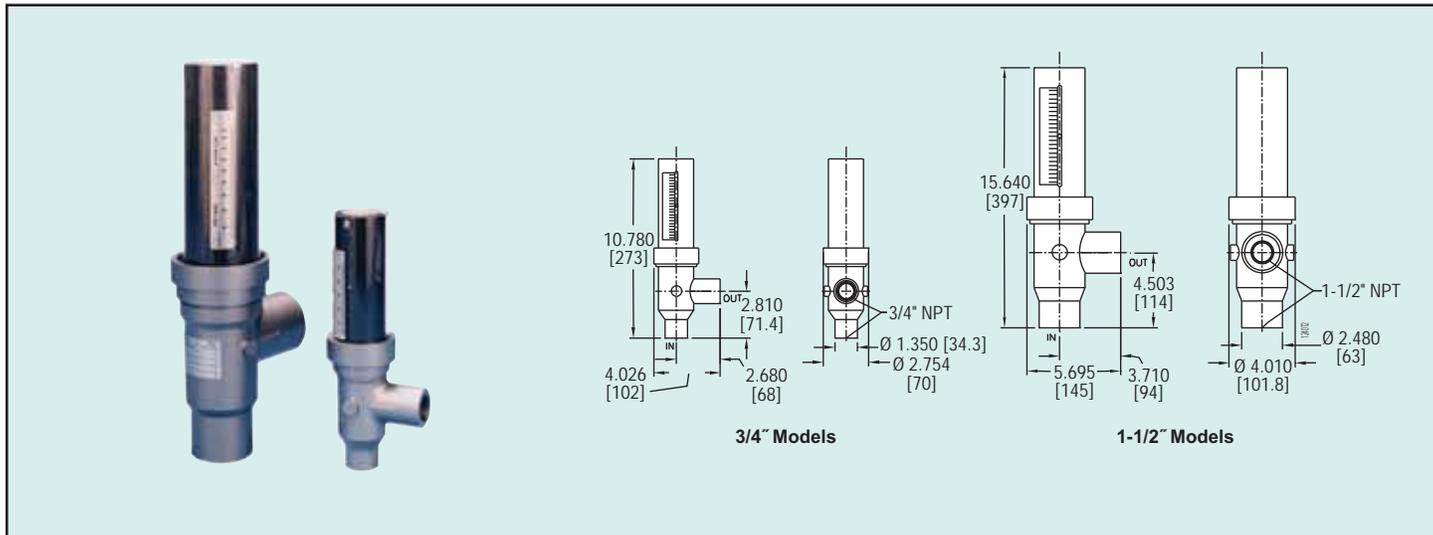

Series SSM 316 & SSB All Metal Flowmeters are ideal for dirty or opaque fluids, high temperature and high pressure service and harsh environments. The direct reading scale provides $\pm 2\%$ accuracy on approximate 25 to 1 ranges, which are wider than typical variable area ball float flow meters. The internal magnet carries the external flow indicator in a non-wetted enclosure. Flowmeters can quickly be disassembled without removing the body from the pipeline for easy cleaning. Pipe adaptors may be used to adapt to alternate size liner without altering accuracy.

SPECIFICATIONS

Service: Compatible liquids and gases.

Wetted Material: T316 SS or brass body depending on series, Alnico magnet, FKM O-ring.

Temperature Limits: 300°F (149°C).

Pressure Limits: 3/4" models: 1000 psig (68.9 bar) @ 250°F (121°C), 1-1/2" models: 800 psig (55 bar) @ 250°F (121°C).

Accuracy: $\pm 2\%$ full scale.

Repeatability: $\pm 0.5\%$ of indicated flow rate.

Process Connections: 3/4" or 1-1/2" female NPT.

Scale Length: 3/4" models: 3.2" (8 cm); 1-1/2" models: 5.2" (13 cm).

Weight: 3/4" models: 5 lb (2.3 kg); 1-1/2" models: 13 lb (5.9 kg).

316 SS Body	Brass Body	Range	Connection	Max. Pressure Loss (Inches)
SSM-00	SSB-00	0.2-5.4 GPM Water (0.75-21 LPM)	3/4"	17.2
SSM-01	SSB-01	0.2-10 GPM Water (1-35 LPM)	3/4"	22.0
SSM-02	SSB-02	0.5-23 GPM Water (0.5-90 LPM)	3/4"	75.0
SSM-03	SSB-03	0.5-35 GPM Water (2-130 LPM)	1-1/2"	18.5
SSM-04	SSB-04	1-50 GPM Water (8-200 LPM)	1-1/2"	26.0
SSM-05	SSB-05	2-70 GPM Water (2-265 LPM)	1-1/2"	80.0
SSM-06	SSB-06	4-120 GPM Water (15-450 LPM)	1-1/2"	130.0
SSM-07	SSB-07	2-50 SCFM Air (4-85 M ³ /HR)	3/4"	4.5
SSM-08	SSB-08	6-125 SCFM Air (10-210 M ³ /HR)	3/4"	11.8
SSM-09	SSB-09	4-260 SCFM Air (10-440 M ³ /HR)	3/4"	93.0
SSM-10	SSB-10	2-310 SCFM Air (10-530 M ³ /HR)	1-1/2"	12.0
SSM-11	SSB-11	10-515 SCFM Air (20-880 M ³ /HR)	1-1/2"	40.0
SSM-12	SSB-12	35-750 SCFM Air (40-1300 M ³ /HR)	1-1/2"	70.0
SSM-13	SSB-13	20-1000 SCFM Air (40-1700 M ³ /HR)	1-1/2"	90.0