




Series
GFT

Flow Totalizer

Seven Digit Display, Easy Installation

CE

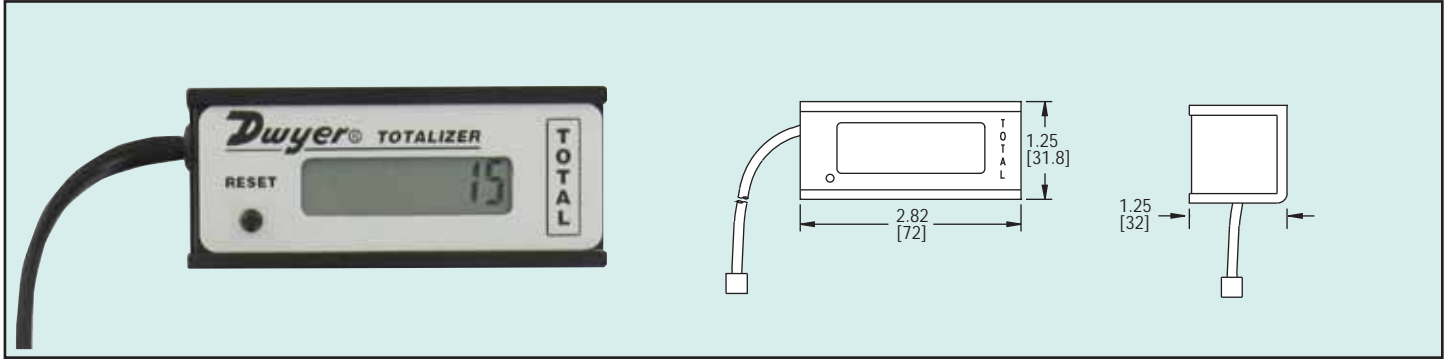

Series GFT Flow Totalizer is designed to be used with mass flowmeters and mass flow controllers. The totalizer accepts analog output flow signals of either 0 to 5 VDC or 5 to 10 VDC. Series GFT integrates and accumulates up to 7 digits of direct engineering units for a given gas and flow rate (standard liters, standard cubic centimeters, etc.). Quickly connect the GFT-10 to Series GFC and GFM mass flow controllers and meters via the modular jack (replacing the LCD display) or use the GFT-10C to connect in parallel with the display.

Model GFT-05, accepts 0 to 5 VDC input
Model GFT-10, accepts 0 to 10 VDC input

SPECIFICATIONS

Input Analog Range: 0 to 5 or 5 to 10 VDC.

Power Consumption: 10 mA @ 12 VDC, less than 0.125 Watts.

Accuracy: $\pm 0.5\%$ FS.

Temperature Stability: ± 100 ppm/ $^{\circ}$ C in the range of 5 to 50 $^{\circ}$ C.

Reset: Momentary tact switch.

Display: 7-digit, 5/16" (8mm) H.

Power Supply: Internal lithium battery.

Agency Approvals: CE.

ACCESSORIES

Model GFT-05C, Cable for 0 to 5 VDC models

Model GFT-10C, Cable for 5 to 10 VDC models