




Series  
VFF

# Visi-Float<sup>®</sup> Flowsetter Flowmeters

Indicate or Manually Control Water Flow, Install in Any Position

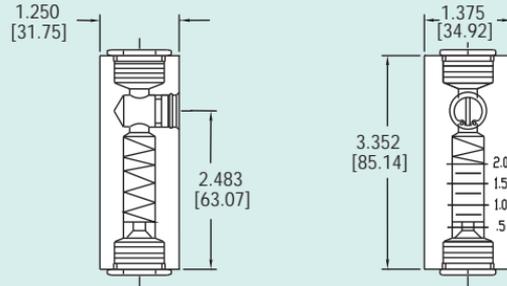

Set the desired flow rate with the Series VFF Visi-Float<sup>®</sup> Flowsetter Flowmeter. Used to indicate or manually control water flow, the solid acrylic construction allows complete visual inspection of the unit. Meters can be easily installed in any position and operation and maintenance is very simple. Designed for use at pressures up to 100 psi (690 kPa) and temperatures up to 150°F (85°C), this unit can be used to control water flow in various applications.

Model	Range GPM Water
VFF-1	0.5 - 2.0
VFF-2	2.0 - 5.0
VFF-3	5.0 - 8.5

## OPTIONS

- Add to end of Model Number
- VIT, Fluoroelastomer O-Rings
- SS, 303 SST Fittings

## SPECIFICATIONS

**Service:** Compatible liquids.

**Wetted Materials:** 302 & 304 SS, Nickel Plated Brass, Acrylic, Buna-N, acetal.

**Temperature & Pressure Limits:** 100 psig @ 150°F (85°C); 150 psig @ 100°F (38°C).

**Accuracy:** ±10% of F.S.

**Process Connections:** 3/8" female NPT.

**Scale Length:** 3/4" (19.1 mm) – 7/8" (22.2 mm), depending on model.

**Mounting Orientation:** Any position.

**Weight:** 4.4 oz (124.7 g).