




Series
PRV

Pneumatic Roller Vibrator


Prevent Material Jams

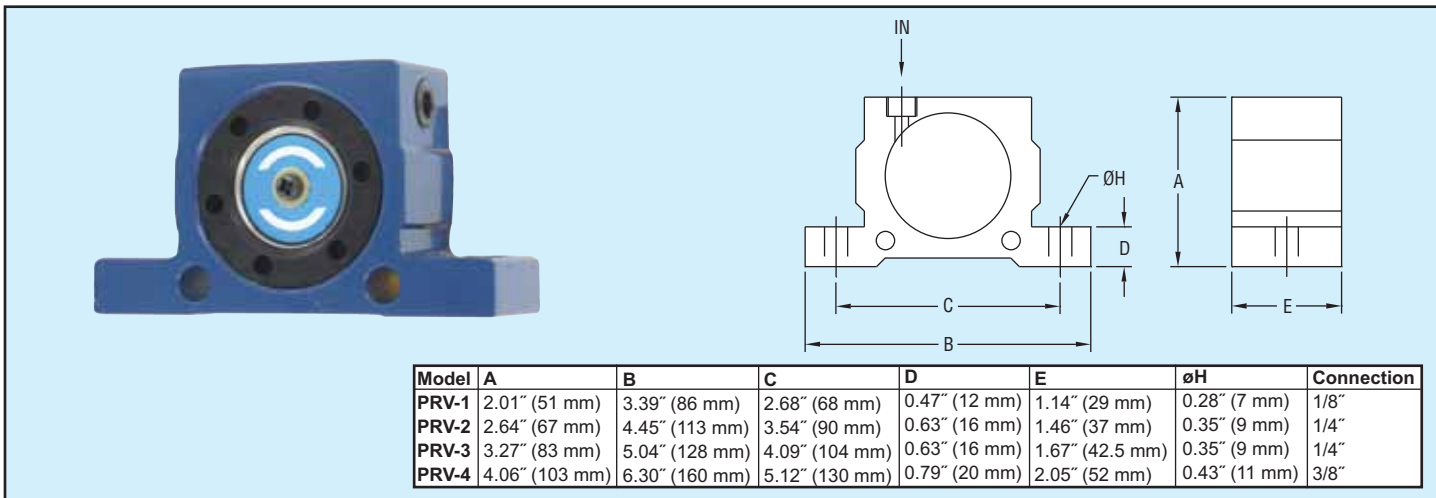

Series PRV Pneumatic Roller Vibrators have a high vibration frequency feature that can prevent material jams in pipe delivery. It can also be applied for bridge-break or concrete injection operation conditions.

How It Operates

The special aluminum body is equipped with a roller and ring with multi-nozzles. It is tightly closed by plastic side covers. Vibration is caused when the roller pushed by compressed air runs in a rotary motion to produce centrifugal force.

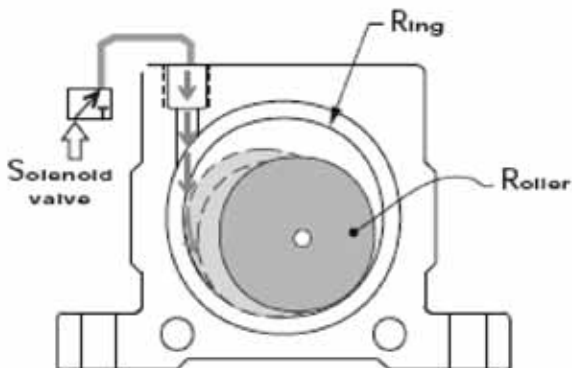

SPECIFICATIONS

Temperature Limit: : 212°F (100°C).

Noise Level Range: 75-100 dBA.

Supply Pressure: 29 to 87 psi (2 to 6 bar).

Air Consumption: See model chart.

Air Connection: 1/8" BSPT female with 1/8" NPT female adapter on PRV-1. 1/4" BSPT female with 1/4" NPT female adapter on PRV-2 and PRV-3. 3/8" BSPT female with 3/8" NPT female adapter on PRV-4.

FEATURES

- Special aluminum body is small in size and light-weight.
- Frequency and amplitude of vibration can be adjusted as required.
- The strongest vibration force driven by rollers among the same size products.

Model	Frequency (V.P.M.) Pressure Input			Force lbf (N) Pressure Input			Air Consumption cfm (l/min) Pressure Input			Weight lb (kg)
	29 psi (2 bar)	58 psi (4 bar)	87 psi (6 bar)	29 psi (2 bar)	58 psi (4 bar)	87 psi (6 bar)	29 psi (2 bar)	58 psi (4 bar)	87 psi (6 bar)	
PRV-1	25000	35000	36000	241 (1070)	656 (2920)	948 (4200)	3.53 (100)	5.12 (145)	6.89 (195)	.53 (0.24)
PRV-2	19000	21000	26000	614 (2730)	1086 (4830)	1376 (6120)	7.06 (200)	10.59 (300)	14.13 (400)	1.19 (0.54)
PRV-3	15500	18500	19000	674 (3000)	1369 (6090)	1675 (7450)	0.24 (290)	15.19 (430)	20.13 (570)	2.1 (0.95)
PRV-4	11000	14000	16000	843 (3750)	1517 (6750)	2001 (8900)	13.07 (370)	19.42 (550)	25.78 (730)	3.97 (1.8)

V.P.M. = vibrations per minute

Level