


Series CLT

Continuous Level Transmitter

Customize To Fit Application, 316 SS or Buna-N Floats

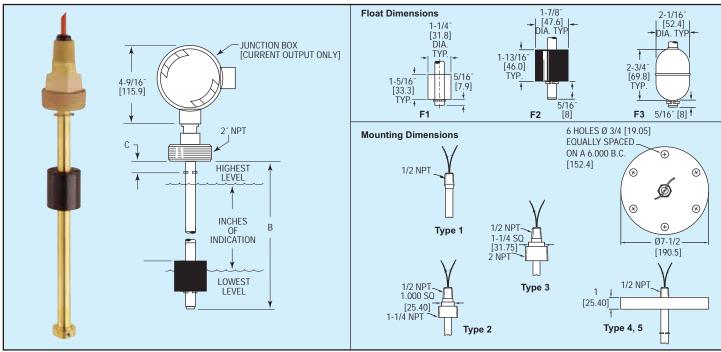

Continuous Output Level Transmitters provide up to the minute tank level monitoring. Customize level transmitters to meet application requirements. Transmitters can be configured for 4 to 20 mA or proportional voltage output, stainless steel or Buna-N floats, and lengths up to 72″ (183 cm).

Models are built to your specifications.

SPECIFICATIONS

Service: Compatible liquids.

Resolution: 1/4".

Temperature Limits: Buna-N floats: 180°F (82°C) in water, -40 to 230°F (-40 to 110°C) in oil; SS floats: -40 to 230°F (-40 to 110°C).

Pressure Limits: Buna-N floats: 150 psig (10 bar); SS floats: 300

psig (21 bar).

Power Requirements: Proportional voltage output models: 10 to 30 VDC; 4-20 mA output models: 10 to 40 VDC.

Loop Resistance: 1.4 k Ω maximum.

Electrical Connections: Proportional voltage output: 24" (61 cm) free leads #22 AWG, TFE jacketed; 4-20 mA output: Junction box.
Enclosure Rating: 4-20 mA mod-

els, NEMA 4 junction box.

Mounting Orientation: Vertical

±20°.

Example	CLT	V	0	5	F3	20.25	02.00	25 50	CLT VICEES	20 25 02 0	0.25.50			
•	CLT	V	0	Э	F3	20.25	02.00	25.50	CLT-VS5F3-20.25-02.00-25.50					
Construction	CLT								Continuous Level Transmitter					
Output		V							Voltage, proportional signal of 0 to supply voltage					
		С							4-20 mA					
Stem and			В						Brass with Beryllium copper stops					
Connection Material			S						316 SS with SS ARMCO PH-15-7MO stops					
				1					1/2" NPT (Output Type V only)					
				2					1-1/4" NPT (Float F1 only) 2" NPT 3" 150# Flange, Carbon Steel (Connection material S only) {Max. pres. 150 psi (10.3 bar)} 3" 150# Flange, 316 SS (Connection material S only)					
				3										
Connection				4										
Type														
				5										
									{Max. pres. 150 psi (10.3 bar)}					
Float									Material	Min s.g.	Max. Pres. psi (bar)	Float Factor in (mm)		
					F1				Buna N	0.55	150 (10.3)	2.0 (50.8)		
					F2				Buna N	0.55	150 (10.3)	2.5 (63.5)		
Туре					F3				316 SS	0.75	300 (20.7)	3.5 (52.4)		
											, ,	, ,		
Indication						00.00			Length that the unit sends an output for level. Maximum is 68" (173 cm).					
Length														
Top Float							00.00		Distance from bottom of mounting connection to upper float stop.					
Stop"C"									Minimum is 1/4" (6.4 mm)					
Dimension														
Overall														
Length "B"								00.00	To calculate overall length, add Indication Length, Top Float					
									Stop Dimension "C", and Float Factor. Maximum length is 72" (1.82 m)					