


Urethane Timing Belts




253 Castleberry Industrial Dr
 Cumming, GA 30040
 800-235-0947 / 770-887-9725
 Fax: 770-887-4138
www.beltcorp.com



Standard widths:

Width	Code
4mm	4
6mm	6
8mm	8
10mm	10
12mm	12


To order:



Non-standard widths
 available on request

Consult our sales department
 for availability

T2.5 Urethane, Steel cord

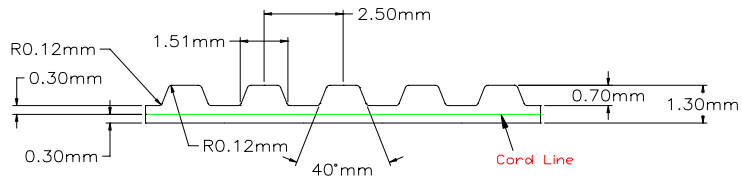

Dimensions in millimeters

Size	# Teeth	Length	Size	# Teeth	Length
T2.5-55	22	55.0	T2.5-330	132	330.0
T2.5-120	48	120.0	T2.5-380	152	380.0
T2.5-145	58	145.0	T2.5-395	158	395.0
T2.5-160	64	160.0	T2.5-420	168	420.0
T2.5-177.5	71	177.5	T2.5-480	192	480.0
T2.5-180	72	180.0	T2.5-492.5	197	492.5
T2.5-182.5	73	182.5	T2.5-500	200	500.0
T2.5-200	80	200.0	T2.5-540	216	540.0
T2.5-225	90	225.0	T2.5-600	240	600.0
T2.5-230	92	230.0	T2.5-620	248	620.0
T2.5-245	98	245.0	T2.5-650	260	650.0
T2.5-250	100	250.0	T2.5-680	272	680.0
T2.5-265	106	265.0	T2.5-700	280	700.0
T2.5-285	114	285.0	T2.5-780	312	780.0
T2.5-290	116	290.0	T2.5-880	352	880.0
T2.5-290	116	290.0	T2.5-915	366	915.0
T2.5-305	122	305.0	T2.5-950	380	950.0
T2.5-317.5	127	317.5	T2.5-1185	474	1185.0