

---

# Temperature and Relative Humidity Probe Model CS215



The CS215 uses the Sensirion SHT75, a combined relative humidity and temperature element, to provide accurate, stable measurements. The probe outputs an SDI-12 signal that our dataloggers can directly measure. Please note that our CR7 and CR9000X dataloggers are not SDI-12 compatible.

The Sensirion SHT75 element is field-replaceable, eliminating the downtime typically required for the recalibration process.



## Sensor Mounts

When exposed to sunlight, the CS215 must be housed in a 41303-5A radiation shield. To attach the 41303-5A to a CM202, CM204, or CM206 crossarm, place the 41303-5A's u-bolt in the bottom holes. To attach the radiation shield directly to a tripod mast, tower mast, or tower leg, place the u-bolt in the side holes.

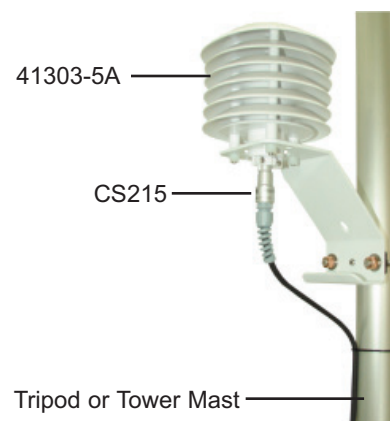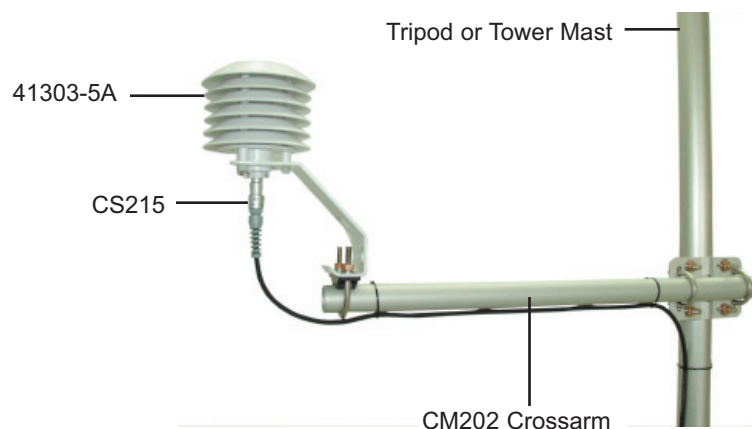

## Ordering Information

CS215-L Temperature & RH Probe with user-specified lead length. Enter lead length, in feet, after the L. For example, a CS215-L6 orders a probe with a 6 foot lead length.

41303-5A 6-Plate Gill Radiation Shield to house the CS215.



**CAMPBELL SCIENTIFIC, INC.**

815 W. 1800 N. • Logan, Utah 84321-1784 • (435) 753-2342 • FAX (435) 750-9540 • [www.campbellsci.com](http://www.campbellsci.com)

---

## **Specifications**

### **Relative Humidity**

Measurement Range: 0 to 100% RH (-20° to +60°C)

Accuracy (at 25°C): ±2.0% (10-90% range), ±4.0% (0-100% range)

Temperature Dependence: better than ±2.0% over -20° to +60°C

Short-Term Hysteresis: <1.0% RH

Typical Long-Term Stability: better than ±1.0% RH per year

Response Time with Filter: <10 s (63% response time in air moving at 1 m s<sup>-1</sup>)

### **Temperature**

Measurement Range: -40° to +70°C

Accuracy: ±0.4°C (+5° to +40°C), ±0.9°C (-40° to +70°C)

Response Time with Filter: 120 s (63% response time in air moving at 1 m s<sup>-1</sup>)

Output Resolution: 0.1°C

### **General**

Supply Voltage: 6-16 Vdc (typically powered by datalogger's 12 V supply)

Typical Current Consumption: 70 µA quiescent, 1.7 mA during measurement (takes 0.7 s)

EMC Compliance: tested and conforms to BS EN61326:2002

Communication Standard: SDI-12 V1.3 (responds to a subset of commands)

Operating Temperature: -40° to +70°C

Weight: 5.3 oz (w/10 ft cable); 150 g (w/3 m cable)

Diameter: 0.5" (1.2 cm) at sensor tip, 0.7" (1.8 cm) at cable end

Length: 7.1" (18.0 cm) including cable strain relief

Housing Material: anodized aluminum

Cable Type: low-temperature cable with Santoprene outer jacket



**CAMPBELL SCIENTIFIC, INC.**

815 West 1800 North • Logan, Utah 84321-1784 • (435) 753-2342 • Fax (435) 750-9540  
Offices also located in: Australia • Brazil • Canada • England • France • Germany • South Africa • Spain

Copyright © 2005, 2006  
Campbell Scientific, Inc.  
Printed May 2006