



## SPECIFICATIONS MODEL 4407 Cat. No. 306000

# **Rath May** Model 4407 Remotely Controllable RJ45 A/B Switch with Dual Remote

The PathWay® Model 4407 RJ45 A/B Switch with Dual Remote Serial Ports allows the user the capability of accessing two separate RJ45 ports via the common port.

The switch may be controlled manually via a front panel pushbutton or remotely by either of two Remote serial ports located on the rear of the unit.

Switch position status may be attained via the front panel LED display or by either of the Remote serial ports located on the rear of the unit.

### Features:

- Allows access to two networks from one COMMON network or device.
- Switches all 8 pins of the RJ45 interface.
- Local control via front-panel pushbutton.
- Remote control allows off-site monitoring and switch management.
- Front Panel LED's display switch position and power status.
- Retains last switch position even in the event of power loss and continues to pass data.
- Rugged aluminum case provides EMI/RFI shielding
- Custom length RJ45 cables available for your switch installation.
- \* Municipalities, schools, government: On GSA Schedule!

#### **OPTION: WIDE RANGE POWER MODULE**

(Cat No 514296) CE and UL listed table mount power module, 100VAC/240VAC, 50Hz/60Hz in place of standard 115VAC power module. Ideal for international applications.



#### Specifications:

**CONNECTORS:** (4) RJ45(F) connectors labeled A, B, C, and COMMON.


**FRONT PANEL CONTROL:** (1) Manual pushbutton allows local switching.

**DISPLAY:** (2) Front Panel LED's display switch position and power status.

**REMOTES:** (2) RJ45 female connectors on rear panel accept ASCII RS232 Serial Data for Remote Control operation.

**POWER:** UL approved 120 VAC, 60Hz wall mount power module supplies 12VDC, 500mA to the unit. **DIMENSIONS:** 5.25" W x 2.0" H x 7.25" D. (13.3 x 5.1 x 18.4 cm)

**WEIGHT:** Approximately 2.0 lbs. (0.9 Kg)

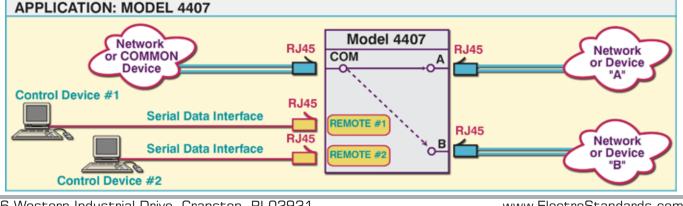

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.co