



**MELT PRESSURE  
TRANSDUCERS & TRANSMITTERS**

300 Industrial Drive, Grand Island, NY 14072 USA  
Tel. (716)775-8830 • Fax (716)775-8020 • sales@gp50.com • www.gp50.com

**Product Specification Sheet**

**FLANGE MOUNTED PRESSURE TRANSMITTER**

**& TEMPERATURE PROBE**

**Models 335, 435 with FX, FY option**



**\*REFER TO APPENDIX A  
FOR WIRING CODES\***

**FEATURES:**


- All-welded stainless steel construction
- State-of-the-art circuitry allows heavier diaphragm and increased fatigue life
- Standard options for every requirement
- HART Communication available (435)

**PRESSURE RANGES:**

- From 0-25 through 0-10,000 psig (See ordering guide)

**ACCURACY:**

- 0.5% FSO standard, 0.25% FSO available
- 0.15% FSO available on Models 435%

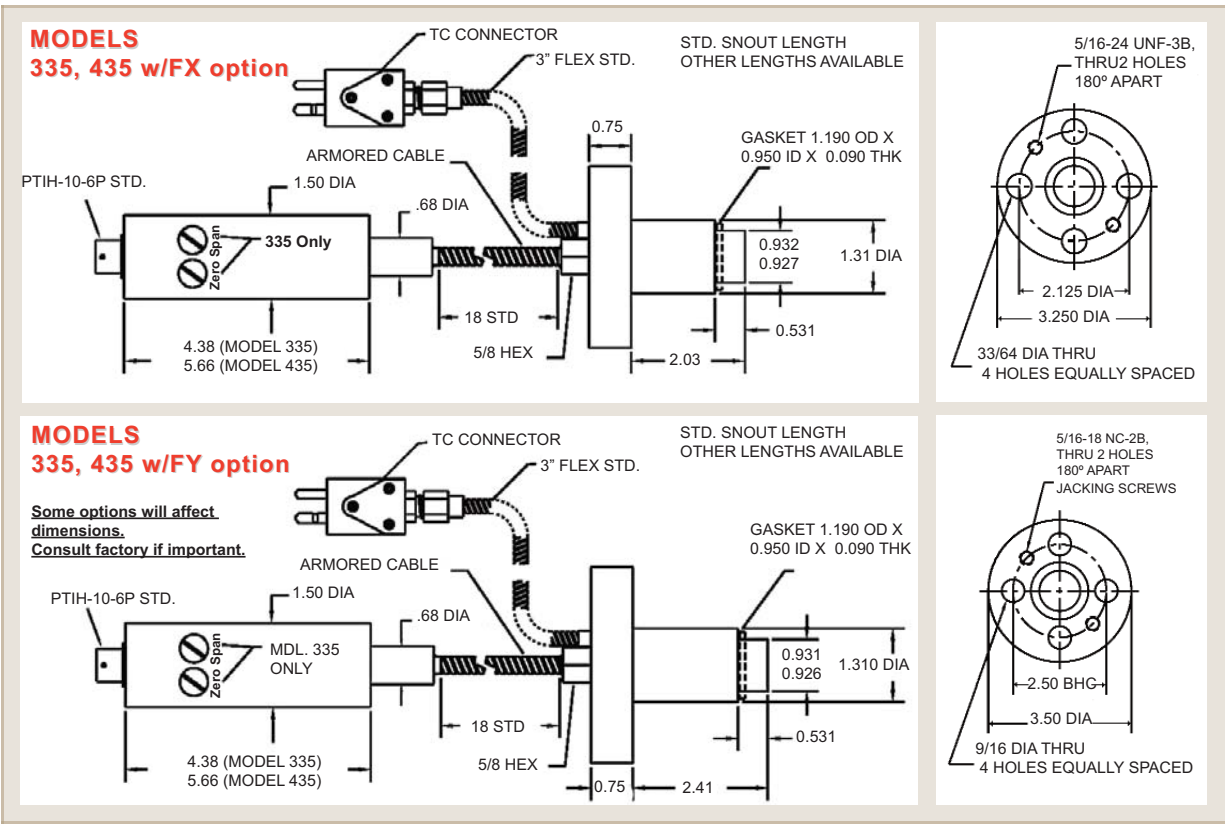

GP:50 reserves the right to make product improvements and amendments to the product specifications stated throughout this brochure without prior notification. Please contact the factory on all critical dimensions and specifications for verification.



## MELT PRESSURE TRANSDUCERS & TRANSMITTERS

300 Industrial Drive, Grand Island, NY 14072 USA  
Tel. (716)775-8830 • Fax (716)775-8020 • sales@gp50.com • www.gp50.com

Specifications reflect standard product, improved performance/mechanical options available. Modifications may alter specs, consult factory for more information.

<b>Accuracy</b>	Static Error Band (Non-linearity, Hysteresis, Non-repeatability, also includes Temperature effects for model 435) ± 0.5% FSO (RSS) (335), ± 0.5% FSO (RSS) ranges less than 500 psi (435), ± 0.2% FSO (RSS) 500 through 3500 psi (435), ± 0.15% FSO (RSS) 5000 through 30000 psi (435)	
<b>Ranging (435 only)</b>	3:1 25 through 2500 psi 5:1 3000 through 30000 psi	
<b>Material in Contact with Pressure Media</b>	316 stainless steel / 15-5 PH diaphragm, Armoloy coated (hard chrome) Diamond, Boron or Titanium Nitride coatings optional	
<b>Proof Pressure</b>	2 times full scale pressure range	
<b>Temperature Limits</b>	Diaphragm 600°F (315°C) Standard Fill Strain Gauge Housing 176°F (80°C)	
<b>Temperature Effects</b>	From Fill (335) <b>Zero</b> 2 psi/100°F at diaphragm From Strain Gauge Housing (335) <b>Zero</b> Less than ± 1.0% FSO/100°F (± 2.0% FSO/100°C) <b>Span</b> Less than ± 1.0% FSO/100°F (± 2.0% FSO/100°C) Fill & Housing (435) Included in accuracy	
<b>Electricals</b>	<b>Excitation Voltage</b> (Model 335) 9-36 Vdc (Model 435) 12-36 Vdc	<b>Output at 70° F</b> 4-20 mA ±2% FSO 4-20 mA ± 2% FSO
Zero Balance	(Model 335) 4.0 mA ±5% FSO at 70°F vertical tip down	(Model 435) 4.0 mA ±0.2% FSO at 70°F vertical tip down
Load Impedance	1350 ohms max. at 36 Vdc & 750 ohms at 24 Vdc	1200 ohms maximum, at 36 Vdc and 600 ohms at 24 Vdc
	<b>Zero Pot. Adjustment (335)</b> + 10% - 80% FSO on ranges below 500 psi	<b>Span Pot. Adjustment (335)</b> ± 20% FSO on ranges above 500 psi
<b>Connections</b>	Pressure 3.5" OD Flange, 3.25" OD Flange (see ordering guide) Electrical PTIH-10-6P connector Thermocouple Standard 2 pole, 7/16" pin spacing	
<b>Enclosed Materials</b>	316 stainless steel	
<b>Mounting Torque</b>	110 inch pounds, maximum	
<b>Identification</b>	Etched stainless steel nameplate welded to body.	

### ORDERING GUIDE

Use the following codes to identify desired item.

MODEL	RANGE	OPTIONS
●	+	● ● ●

Example: 335-PO-FY

MODEL	
335	4-20 mA
435	4-20 mA / Hart
PRESSURE RANGE (PSI)	
PO 25	RJ 600
PT 30	RK 750
PV 50	RM 1000
PX 75	RO 1500
PZ 100	RR 2000
RB 150	RS 2500
RD 200	RT 3000
RE 250	RV 5000
RF 300	RX 7500
RH 500	RZ 1000
(BAR)	
UL 2	UY 100
UM 3	UZ 150
UN 5	VA 200
UP 7.5	VB 300
UQ 10	VC 350
UR 15	VD 500
US 20	VE 700
UT 30	VF 750
UV 50	UA 1000
UX 75	SZ Non-Stand. Pressure Range or Engineering Units

### OPTIONS

<b>FX</b>	3.25" Flange (2.03 Standard Snout Length)
<b>FY</b>	3.50" Flange (2.41 Standard Snout Length)
<b>CF</b>	1/2" NPT(M) thread with 72" leads for conduit connection
<b>GB</b>	Alternate Electronic Output - specify zero and span output values
<b>MD</b>	Zero and Span Controls, 330X, 331X only. (Span adjustment ± 20% FSO, Zero adjustment +10% - 80% FSO for ranges below 500 psi, Zero adjustment ± 20% FSO for ranges 500 psi and up)
<b>GP</b>	Hastelloy C-276 Diaphragm and Nose
<b>QS</b>	Diamond coating
<b>GV</b>	Silicone Oil Fill. (Increases Thermal Shift) Consult factory, 600°F max
<b>GX</b>	Mineral Oil Fill. (Increases Thermal Shift) Consult factory, 600°F max
<b>GZ</b>	Customer Special
<b>JA</b>	100 ohm 3 wire RTD (models 430X, 431X only)
<b>QB</b>	Custom Nameplate
RIGID STEM	
<b>GN</b>	12.5" Rigid Stem
<b>GO</b>	9" Rigid Stem
<b>HU</b>	4" Rigid Stem
<b>MU</b>	Non-Standard Rigid Stem (Specify Length)
FLEX TUBING	
<b>GT</b>	30" Armored Capillary Tube
<b>HS</b>	9" Armored Capillary Tube
<b>HV</b>	24" Armored Capillary Tube
<b>HY</b>	12" Armored Capillary Tube
<b>MT</b>	Non-Standard Flex Tube (Specify Length)
SNOOT LENGTH	
<b>MU</b>	Non-Standard Snout Length and or Flange (Specify Length)