SPECIFICATIONS MODEL 7810

Cat. No. 307810

Model 7810 8-to-1 HD-15 Switch with 10 BaseT/100 BaseTX LAN Access

IP Addressable For Critical Network Alternate-Path Switching!

INTRODUCTION:

The Model 7810 8-to-1 HD-15 Switch with 10 BaseT/100 BaseTX LAN Access, allows the user the capability of sharing a single port HD-15 interface device connected to the "COMMON" port among eight other devices connected to

the Channel 1-8 ports with local and remote access functionality. Remote access can be accomplished by a 10-Base-T/100 BaseTX connection.

Proper authentication is required for remote access via the 10 BaseT/100 BaseTX connection. Users can remotely monitor status, control switch functions, lock/unlock front panel access and configure the LAN Access port.

FEATURES:

- The switch ports are transparent to all data.
- Twelve of the HD-15 interface pins are switched.
- All switched signals are passed via copper contact relays that maintain their position and continuity even in the event of a power loss or failure.
- Remote control of the switch position from a 10 BaseT/100 BaseTX LAN Ethernet environment or alternatively, the front panel push button.
- Rackmount configuration is standard.

SOFTWARE FEATURES:

- Access User Interface via standard web browser.
- Login password authentication required.
- Easy to use, simple point and click operation.
- Remote access to control or monitor the Model 7810 Switch System.
- Users can change the login password and/or the switch's IP address.
- Lockout front panel manual access.
- LAN access gives users across the LAN or over the Internet access to control if user network is configured accordingly.



IP Addressable!!!

Specifications:

PORT CONNECTORS: (9) HD15 (F) connectors

labeled CHANNEL 1-8 and COMMON.

REMOTE PORT: (1) RJ45 (F), accepts 10 Base-T LAN access Ethernet for Remote Control.

POWER: UL Approved 110/120VAC, 60Hz wall mount power module supplies 12 VAC, 500 mA to the Model 7810.


DISPLAY: (8) Red LED's indicate switch position, status and power.

CONTROL: (1) Pushbutton control allows local switching.

DIMENSIONS: 19" W x 3.5" H x 10" D.

WEIGHT: 4.5 lbs.

Don't forget to order your HD15 Cables!

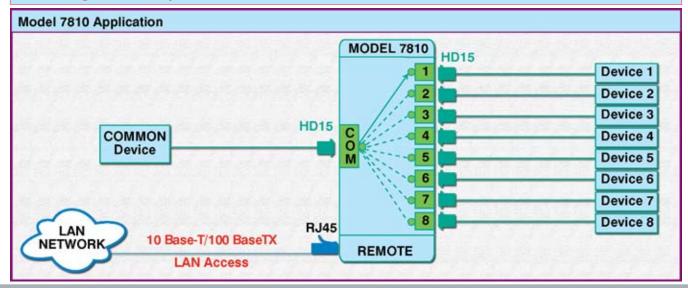

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com